



Calhoun: The NPS Institutional Archive

Theses and Dissertations

Thesis Collection

1991-03

ESKAPE/CF: a knowledge acquisition tool for expert systems using cognitive feedback

Connor, James W.

Monterey, California. Naval Postgraduate School

<http://hdl.handle.net/10945/28173>



Calhoun is a project of the Dudley Knox Library at NPS, furthering the precepts and goals of open government and government transparency. All information contained herein has been approved for release by the NPS Public Affairs Officer.

**Dudley Knox Library / Naval Postgraduate School
411 Dyer Road / 1 University Circle
Monterey, California USA 93943**

<http://www.nps.edu/library>

NAVAL POSTGRADUATE SCHOOL

Monterey, California



THESIS

C 71575

**ESKAPE/CF: A KNOWLEDGE
ACQUISITION TOOL FOR EXPERT SYSTEMS
USING COGNITIVE FEEDBACK**

by

James W. Connor, Jr.

March 1991

Thesis Advisor:

Kishore Sengupta

Approved for public release; distribution is unlimited.

T253955

REPORT DOCUMENTATION PAGE

a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED		1b. RESTRICTIVE MARKINGS	
a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution is unlimited	
b. DECLASSIFICATION/DOWNGRADING SCHEDULE		5. MONITORING ORGANIZATION REPORT NUMBER(S)	
c. PERFORMING ORGANIZATION REPORT NUMBER(S)		7a. NAME OF MONITORING ORGANIZATION Naval Postgraduate School	
a. NAME OF PERFORMING ORGANIZATION Administrative Science Dept. Naval Postgraduate School	6b. OFFICE SYMBOL (if applicable) Code 37	7b. ADDRESS (City, State, and ZIP Code) Monterey, CA 93943-5000	
c. ADDRESS (City, State, and ZIP Code) Monterey, CA 93943-5000	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER		
a. NAME OF FUNDING/SPONSORING ORGANIZATION	8b. OFFICE SYMBOL (if applicable)	10. SOURCE OF FUNDING NUMBERS	
c. ADDRESS (City, State, and ZIP Code)	PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.
			WORK UNIT ACCESSION NO.
1. TITLE (Include Security Classification) ESKAPE/CF: A KNOWLEDGE ACQUISITION TOOL FOR EXPERT SYSTEMS USING COGNITIVE FEEDBACK (U)			
2. PERSONAL AUTHOR(S) Connor, James, W. Jr.			
3a. TYPE OF REPORT Master's Thesis	13b. TIME COVERED FROM 09/89 TO 03/91	14. DATE OF REPORT (Year, Month, Day) March 1991	15. PAGE COUNT 89
6. SUPPLEMENTARY NOTES The views expressed in this thesis are those of the author and do not reflect the official policy or position of the Department of Defense or the United States Government.			
7. COSATI CODES		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) Expert Systems, Knowledge Acquisition, Cognitive Feedback	
FIELD	GROUP	SUB-GROUP	
9. ABSTRACT (Continue on reverse if necessary and identify by block number) The major bottleneck in the construction of expert systems is the time-consuming process of acquiring knowledge from experts. Automated knowledge acquisition tools have demonstrated the ability to reduce the time required to construct expert system knowledge bases and are supported by both knowledge engineers and experts. However, due to limitations in their underlying psychological paradigms, existing tools may not be well-suited to extracting semantic or procedural knowledge from an expert. This thesis designs and implements an Expert System Knowledge Acquisition and Policy Evaluation tool using Cognitive Feedback (ESKAPE/CF), based on Lens model techniques which have demonstrated effectiveness in capturing policy knowledge. The system is designed to be used interactively by an expert to reduce the historically lengthy interactions with a knowledge engineer. Additionally, the use of cognitive feedback techniques should enable the system to capture expertise that has heretofore been unobtainable by existing knowledge acquisition tools.			
10. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS		21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED	
22a. NAME OF RESPONSIBLE INDIVIDUAL Ashore Sengupta		22b. TELEPHONE (Include Area Code) (408) 646-3212	22c. OFFICE SYMBOL AS/SE

Approved for public release; distribution is unlimited.

ESKAPE/CF: A Knowledge
Acquisition Tool for Expert Systems
Using Cognitive Feedback

by

James W. Connor, Jr.
Lieutenant Commander, United States Naval Reserve
B.S., University of Illinois, 1979

Submitted in partial fulfillment
of the requirements for the degree of

MASTER OF SCIENCE IN INFORMATION SYSTEMS

from the

NAVAL POSTGRADUATE SCHOOL
March 1991

Department of Administrative Sciences

ABSTRACT

The major bottleneck in the construction of expert systems is the time-consuming process of acquiring knowledge from experts. Automated knowledge acquisition tools have demonstrated the ability to reduce the time required to construct expert system knowledge bases and are supported by both knowledge engineers and experts. However, due to limitations in their underlying psychological paradigms, existing tools may not be well-suited to extracting semantic or procedural knowledge from an expert.

This thesis designs and implements an Expert System Knowledge Acquisition and Policy Evaluation tool using Cognitive Feedback (ESKAPE/CF), based on Lens model techniques which have demonstrated effectiveness in capturing policy knowledge. The system is designed to be used interactively by an expert to reduce the historically lengthy interactions with a knowledge engineer. Additionally, the use of cognitive feedback techniques should enable the system to capture expertise that has heretofore been unobtainable by existing knowledge acquisition tools.

700
01/5/12
9.1

TABLE OF CONTENTS

I.	INTRODUCTION	1
A.	GENERAL	1
B.	BACKGROUND	2
C.	PROBLEM DESCRIPTION	3
D.	THESIS OBJECTIVE	4
E.	SCOPE	4
F.	ORGANIZATION OF THE STUDY	4
II.	LITERATURE REVIEW	6
A.	INTRODUCTION	6
B.	PROBLEMS IN ACQUIRING KNOWLEDGE FROM EXPERTS	7
1.	The Nature of Expertise	7
2.	Expert Learning	8
3.	Expert Decision Making	8
C.	KNOWLEDGE ACQUISITION	9
1.	Types of Knowledge	10
2.	Decision Tasks	12
3.	Direct Knowledge Acquisition	12
4.	Indirect Knowledge Acquisition	13
5.	Automated Knowledge Acquisition	13
6.	Limitations of Knowledge Acquisition	14

D.	COGNITIVE FEEDBACK	15
1.	The Lens Model	15
2.	Single Systems	16
3.	Cognitive Feedback	17
4.	Presentation of Cognitive Feedback . . .	17
E.	SUMMARY	18
III.	ESKAPE/CF: A TOOL FOR KNOWLEDGE ACQUISITION . . .	20
A.	System Overview	20
1.	Terminology	21
a.	Cue	21
b.	Judgment node	21
c.	Root judgment	21
d.	Child	22
e.	Sibling	22
f.	Cue weights (beta weights)	22
g.	Subtree	22
2.	ESKAPE/CF Hardware and Software Requirements	22
3.	ESKAPE/CF Session Overview	23
4.	ESKAPE/CF Application Areas	24
5.	Program Limitations	25
a.	Decision Cues	25
b.	Discrete Decision Cues and Judgment Nodes	25

B.	SAMPLE KNOWLEDGE ACQUISITION SESSION	26
1.	Program Initiation and Operation	27
2.	Initializing Root Judgment Value	30
3.	Adding New Cues	30
4.	Exploding Cues	34
5.	Correlating Cues	40
6.	Evaluating Cues	43
7.	Feedback	46
	a. Cue Relationships with Decision	
	Weights	46
	b. Decision Weights	49
	c. Function Forms	49
8.	Viewing the Knowledge Base	49
9.	Generating Sample Cases	54
10.	Editing Cues	57
11.	Deleting Cues	57
12.	Moving Cues	57
13.	Saving the Knowledge Base	63
14.	Loading Knowledge Bases	68
15.	Clear Tree	68
C.	SUMMARY	68
IV.	CONCLUSIONS AND SUGGESTIONS FOR FUTURE RESEARCH .	71
A.	CONCLUSIONS	71

B.	FUTURE RESEARCH	72
1.	ESKAPE/CF System Enhancements	72
a.	Linear Logistic Analysis	72
b.	X-Windows Compatibility	72
c.	Applying ESKAPE/CF Knowledge to a Working Expert System	73
d.	Expand the ESKAPE/CF Data Keeping Facilities	73
2.	Assessing ESKAPE/CF Validity	73
a.	Applicable Task Areas	73
b.	System Usability	73
c.	Comparison of Results using Different Experts	73
d.	Comparison of Results with Other Models	74
3.	ESKAPE/CF Extensions	74
a.	Learning Complex Tasks	74
b.	Combining Expert Knowledge	74
c.	Study the Decision Processes of Experts	75
APPENDIX.	SAMPLE USER TRACE	76
LIST OF REFERENCES	77
INITIAL DISTRIBUTION LIST	81

I. INTRODUCTION

A. GENERAL

One of the most critical aspects in the building of expert systems is the formulation of knowledge bases used by those systems. Despite considerable advances in computer technology, the major bottleneck in the construction of knowledge bases continues to be the time-consuming process of acquiring knowledge from experts (Olson & Rueter 1987).

Automated knowledge acquisition tools have demonstrated the ability to reduce the time required to construct expert systems (Boose 1985). But, due to limitations in their underlying psychological paradigms, current tools may not be well-suited to extracting semantic or procedural information from an expert (Boose 1985; Patterson 1990).

This research proposes an Expert System Knowledge Acquisition and Policy Evaluation tool using Cognitive Feedback, **ESKAPE/CF**. ESKAPE/CF is based on Lens model techniques which have demonstrated effectiveness in capturing policy knowledge (Balzer, Doherty, & O'Connor 1989). The ESKAPE/CF prototype model evolved from initial design descriptions proposed by Charles Patterson (1990).

B. BACKGROUND

Expert systems can be defined as a computer-based system consisting of a user interface, an inference engine and a "knowledge base" (McNurlin & Sprague 1989, 448). Expert systems are tailored to solve specific problems and are becoming prevalent in such diverse areas as engine failure diagnosis, tax planning, space shuttle crew schedules, and law and regulation interpretation (Olson & Rueter 1987; McNurlin & Sprague 1989, 450; Patterson 1990).

The difficult and time-consuming process of eliciting knowledge from experts is often referred to as "knowledge engineering." Although expertise for knowledge bases can also be acquired from books, databases, reports, etc., it is most often obtained by direct interaction with an expert (Patterson 1990). Traditional methods of knowledge engineering such as interviews and protocol analysis may be of limited usefulness because the expert can not always articulate how his or her decisions are made (Cooke & McDonald 1988; Boose 1985). This tedious process of obtaining relevant information from experts has often driven knowledge engineers to becoming experts themselves (Olson & Rueter 1987).

Insufficient numbers of trained knowledge engineers coupled with the possibility of losing knowledge in the transfer process has led to the increased use of interactive systems directly by an expert (Shaw & Gaines 1988). These

automated tools have demonstrated the capability to shorten project development time and thus reduce the bottleneck in the construction of expert systems. Additionally, the success of such knowledge elicitation tools has challenged the cost effectiveness of the knowledge engineer as an intermediary in the knowledge acquisition process (Shaw & Gaines 1988). Unfortunately, since no single model can capture all levels or types of expertise (Olson & Rueter 1987), careful evaluation of available knowledge acquisition tools and techniques is required to match the tool with the particular application (Kitto & Boose 1989).

C. PROBLEM DESCRIPTION

The background section highlights one of the major problem areas with knowledge acquisition tools. Specifically, the tool selected must be tailored to the individual expert system application and the individual expert whose knowledge is to be captured.

Use of the proper knowledge acquisition tool will minimize the disparity between the knowledge elicited and the actual knowledge held by the expert. Furthermore, any translation errors that might be introduced during the traditional knowledge engineering process will be diminished (Patterson 1990).

D. THESIS OBJECTIVE

This thesis has as its primary objective, the construction of a prototype knowledge acquisition tool, **ESKAPE/CF**, based on an earlier study conducted at the Naval Postgraduate School that determined initial high level specifications (Patterson 1990).

E. SCOPE

The scope of this thesis is limited to the construction of the prototype knowledge acquisition tool, **ESKAPE/CF** and generation of a sample knowledge acquisition session for demonstration purposes. Since this thesis is a follow-on to the work of Charles Patterson (1990), the literature review basically consists of a summary of his research with minor additions.

F. ORGANIZATION OF THE STUDY

This thesis, excluding the introduction and conclusion, is divided into two major sections. The first main section, Chapter II, is basically a summary of the research conducted by Charles Patterson. The information presented is necessary for reader to understand the theory upon which the **ESKAPE/CF** model is based. This chapter highlights knowledge acquisition techniques, principles of cognitive feedback, expert judgement strategies, and a limited discussion of current knowledge acquisition tools.

The second main section, Chapter III, consists of a description of the **ESKAPE/CF** model including a "walk-through" of a sample knowledge acquisition session. Using this chapter as a guide or "Users Manual", an expert will be able to use the **ESKAPE/CF** system to generate a knowledge base.

II. LITERATURE REVIEW

A. INTRODUCTION

The task of constructing a knowledge base for an expert system is multi-faceted and interdisciplinary. To capture expert knowledge, one must first understand how an expert makes a decision and how that decision knowledge, or expertise, is represented. The proper method must then be chosen to elicit that knowledge from the expert. Only when the relevant knowledge is extracted can the actual construction of a knowledge base begin.

Decision theory, behavioral science, and cognitive science are among the disciplines that contribute to the understanding of expertise and expert decision making (Balzer, Doherty, & O'Connor 1989; Gaines 1987). Additionally, they lay the framework around which knowledge elicitation techniques are developed. A basic understanding of the aforementioned techniques and underlying theories is essential when constructing any knowledge acquisition system. This section is a broad overview of these topics. A detailed discussion is contained in Patterson (1990).

B. PROBLEMS IN ACQUIRING KNOWLEDGE FROM EXPERTS

Shanteau (1988) describes an expert as one who is "considered by colleagues to be the best at making decisions." Whether one uses the preceding description or identifies an expert on the basis of test scores or "self-proclamation," difficulties can arise when trying to acquire that expert's knowledge. Additionally, the nature of that knowledge or expertise is viewed differently by different disciplines.

1. The Nature of Expertise

Cognitive psychologists view expertise as domain specific and maintain that experts develop problem solving techniques that are rooted in that domain of expertise. Therefore, an expert's performance is often lessened outside his or her field of specialization. (Shanteau 1990) Additionally, as they gain experience, experts tend to rely on "automated" decision processes, similar to pattern recognition, in their thinking (Shanteau 1990; Larkin, McDermott, Simon, & Simon 1980). However, no matter how much experience an expert has accumulated, expert thinking is not infallible.

Shanteau (1990) concludes that "experts are inadequate decision makers." Research indicates (Einhorn 1974; Shanteau & Gaeth 1981; Carroll & Payne 1976) that experts are often unreliable and inaccurate (Shanteau 1990). Experience tends to make an expert more confident, but is not necessarily

related to enhanced decision making abilities, improved accuracy, or improved consistency (Meehl 1954; Shanteau 1990). Furthermore, it appears that experts themselves are unaware of the aforementioned shortcomings (Shanteau 1990).

2. Expert Learning

The acquisition of expertise can be viewed as a three stage transformation of knowledge representation. Fitts and Posner (1967) identify the first of these stages as the "cognitive stage," where the expert memorizes facts required to perform a given task. At this stage, the expert can easily articulate how he or she makes a decision or performs a task. (Shanteau 1990; Anderson 1982)

The second stage is the "associative stage," where the expert begins forming decision rules between elements he or she has memorized in the previous stage. (Shanteau 1990; Anderson 1982)

The final stage is the "autonomous stage," where the skill acquisition is complete. At this stage, the acquired skills become almost automatic and the expert may have difficulty in relating exactly how he or she performs the given task. (Shanteau 1990; Anderson 1982)

3. Expert Decision Making

When making a decision, an expert must select inputs from a myriad of cues and decide which of those cues to assimilate and which to ignore (Phelps & Shanteau 1978;

Einhorn 1974). The expert then clusters similar cues to reduce the complexity of the information processing task, assigns weights to each of the cues, and combines them to achieve a final decision (Einhorn 1974). Although one would expect an expert to use all relevant data, empirical data suggests that they often do not. It has been shown that some experts use as few as three cues while others can integrate as many as nine to eleven cues (Phelps & Shanteau 1978). Additionally, some experts use these cue combinations as the basis for heuristic decision making (Shanteau 1990).

Unfortunately, experts are often poor at accurately assessing the weights and combinations of cues used in their decision making processes (Einhorn 1974). In fact, experts are often unable to articulate exactly what cues they consider when making a decision (Cooke & McDonald 1988; Boose 1985; Gaines 1987; Shanteau 1988). Furthermore, their expertise may not be understandable or expressible in language. It may also be inapplicable, incomplete, irrelevant, or incorrect (Gaines 1987). Knowledge acquisition techniques must compensate for these shortcomings.

C. KNOWLEDGE ACQUISITION

Research has shown that "expertise is domain specific" (Shanteau 1990). Although some decision *strategies* have been used in different decision situations, expertise tends to be tailored to cognitive tasks depending on the particular

problem (Shanteau 1990; Shanteau 1988). These tasks, in turn, may require manipulation of different types of knowledge that the expert possesses (Patterson 1990). This section highlights the types of decision tasks confronting an expert, the types of knowledge used in those decisions, and an overview of current techniques in eliciting that knowledge from an expert.

1. Types of Knowledge

Although several methods of classifying knowledge exist in literature, none is universally accepted. (Patterson 1990). One widely used methodology was proposed by McGraw and Riner (1987) which classified knowledge into four basic types: procedural, declarative, semantic, and episodic (Patterson 1990).

Declarative knowledge is "surface level information that experts can verbalize" (Patterson 1990). This differs from procedural knowledge in that the expert is aware of its existence and can articulate it. Declarative knowledge is generally easy to acquire (McGraw & Riner 1987).

Procedural knowledge includes deeply ingrained skills which may include automatic responses to stimuli. Experts develop this knowledge over time, have great difficulty in articulating or even identifying it (McGraw & Riner 1987; Patterson 1990).

Semantic and episodic knowledge are the two theoretical components of long term memory. Semantic knowledge is difficult for experts to express because it reflects cognitive organization, structure, and representations and includes such memories as vocabulary, concepts, definitions, and interrelationships between facts. A knowledge engineer must effectively capture semantic knowledge to ensure a viable expert system. (McGraw & Riner 1987; Patterson 1990)

Episodic knowledge represents experiential and autobiographical information that the expert chunks into episodes. This information is difficult to extract because the knowledge is stored in chunks and the expert may not be aware of individual knowledge entities or how it affects his or her decision-making processes. (McGraw & Riner 1987; Patterson 1990)

An expert's knowledge, therefore, undergoes a transformation -- from declarative knowledge, that the expert is aware of, to procedural knowledge which the expert may not even be able to identify. This evolution of knowledge is akin to the transformation of skills from the "cognitive stage" to the "autonomous stage", as discussed in the previous section. It is for this reason that experts have so much difficulty in expressing knowledge -- procedural knowledge is made

autonomous, leaving the expert often unaware of the exact steps in the decision making process. (Shanteau 1990; McGraw & Riner 1987; Anderson 1982)

2. Decision Tasks

As with knowledge types, there is no universally accepted theory that can categorize all types of problem-solving tasks. However, these tasks can be associated with one of two broad categories summarized by Kitto and Boose (1989): *analysis* (interpretive) tasks and *synthesis* (constructive) tasks (Patterson 1990). Examples of analysis tasks include such areas as diagnosis and debugging while synthesis tasks include evaluation, planning, and scheduling. These two task areas can be combined to yield *analysis-synthesis* tasks which include control, monitoring, and repair (Patterson 1990).

3. Direct Knowledge Acquisition

Direct knowledge acquisition techniques, such as interviews or questionnaires, rely on experts to articulate their knowledge. This may be of limited usefulness in extracting procedural, semantic or episodic knowledge because experts may not be able to "express what they know" in language (Gaines 1987; Patterson 1990). Furthermore, transcription and analysis of an expert's responses are extremely time-consuming, increasing both the development time and cost of an expert system.

4. Indirect Knowledge Acquisition

Indirect knowledge acquisition techniques rely on various psychological paradigms to avoid relying on an expert's articulation and introspection (Patterson 1990). These methods rely on the knowledge engineer to determine the appropriate psychological model "*a priori*" to ensure that the selected method matches the task and type of knowledge required.

5. Automated Knowledge Acquisition

One of the most common paradigms used in automated knowledge acquisition is Kelly's Personal Construct Theory (1955) using repertory grid techniques (Boose 1985). These programs require the expert to assess decision cues and their interrelationships to determine decision rules (Boose 1985). Repertory grids are used to classify and cross-reference real-world objects. Because people can usually discern between differences and similarities (Garg-Janardan & Salvendy 1988), the expert is presented with groups of three objects and asked to indicate how two of the items are alike and yet different from the third. This characterization of objects can be on a bi-polar scale (either it has a trait or it doesn't) or on an ordinal scale (normally 1-5) (Shaw & Gaines 1988). Prototype expert systems constructed using Personal Construct techniques have been developed in as little as two hours (Kitto & Boose 1989).

Repertory grid techniques work best at identifying traits and relationships for analysis class or structured problems, but are not as effective in obtaining causal knowledge -- when or how information is used in a decision-making task (Boose & Bradshaw 1988; Boose 1985). Furthermore, Personal Construct psychology procedures do not guarantee that sufficient knowledge will be acquired to solve a specified problem (Boose & Bradshaw 1988).

6. Limitations of Knowledge Acquisition

Since no single model can capture all levels or types of information (Olson & Rueter 1987), careful evaluation of available knowledge acquisition tools and techniques is required to match the tool with the particular application (Kitto & Boose 1989). Although several knowledge acquisition techniques have been useful in extracting declarative knowledge, there are no satisfactory methods for consistently extracting semantic or procedural knowledge (Patterson 1990).

The survey of knowledge acquisition techniques by Patterson (1990) indicated the need for an automated knowledge acquisition tool that could elicit semantic and procedural knowledge. Techniques based on cognitive feedback (CFB) and the lens model have demonstrated potential in such tasks (Balzer, Doherty, & O'Connor 1989).

D. COGNITIVE FEEDBACK

This section provides an overview of the lens model, cognitive feedback techniques and possible applications of cognitive feedback.

1. The Lens Model

Brunswick's lens model (1955) addresses decision-making under uncertainty (Patterson 1990) and the integration of information from multiple decision cues (Einhorn, Kleinmuntz, & Kleinmuntz 1979). "The model can be viewed as an individual judging an event or object (criterion), which cannot be directly perceived, through a lens of cues" (Patterson 1990).

Libby (1981) further refined the model into three separate elements: the criterion event, the task environment (X_1, X_2, \dots, X_k), and the judge's estimate. The lens model summarizes the relationships between these elements (see Figure 1) (Patterson 1990).

The cognitive system of an individual judge is denoted by the right side of the lens model. The degree that a judge relies upon individual cues is measured by the relationship between the cue (X_i) and the judgement (Y_j). This utilization coefficient or beta weight may be positive or negative. If a cue is ignored by the judge in the decision making process, the beta weight will be zero. The left side, or task system,

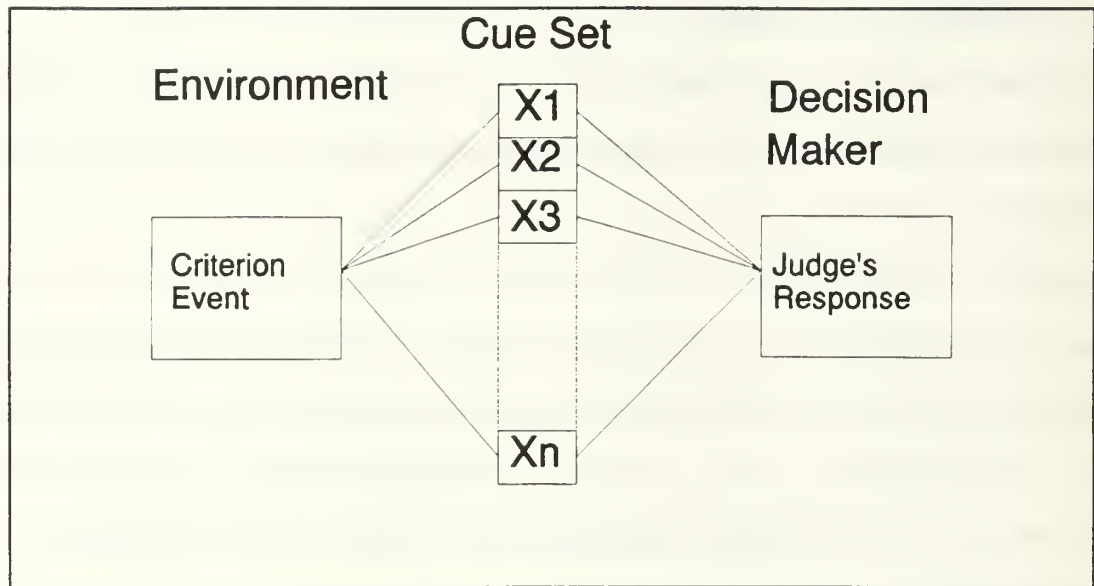


Figure 1. Simplified Lens Model. (Libby 1981)

of the lens model is similar to the right side, as required by the principle of parallel concepts. (Patterson 1990)

2. Single Systems

The *single system paradigm*, as shown in Figure 2, involves analysis of only the cognitive side of the lens model, whereas a *double system paradigm* (Figure 1) involves interaction between both the cognitive and task sides. This single system view allows analysis of a set of cues and judgements by linear regression methods (Brehemer 1979). Research has demonstrated that the decision processes of an individual can be simulated by this model, using the beta weights for individual cues as the coefficients for the regression variables (Patterson 1990).

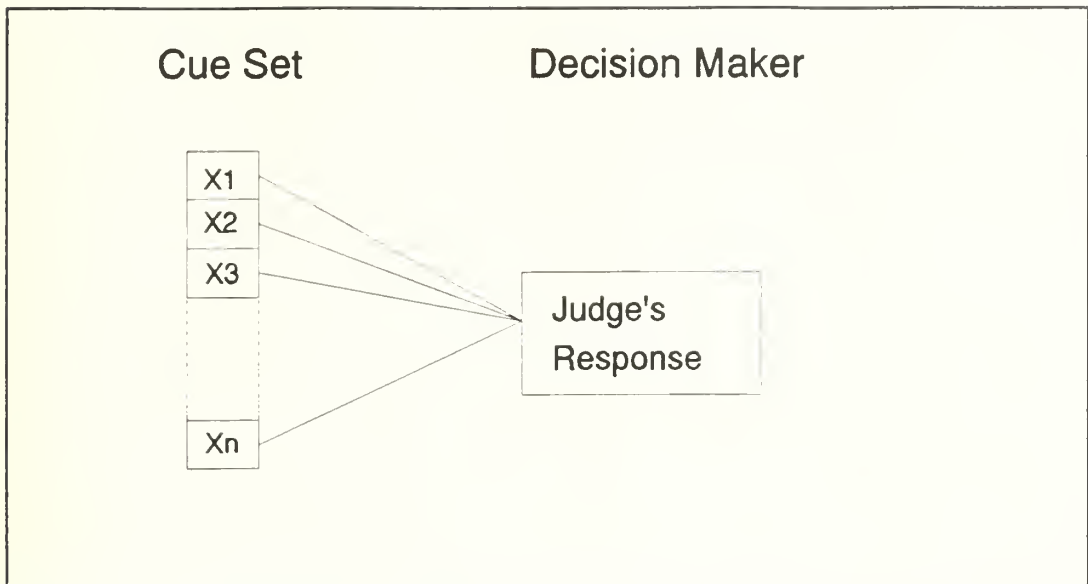


Figure 2. Single System Case. (Libby 1981)

3. Cognitive Feedback

Cognitive information returned to a decision maker can be used to gain insight into that decision maker's value system in a given environment. Research indicates that individuals often cannot verbalize their decision policies. When they do verbalize, those descriptions are often inaccurate descriptions of their decision policies. Cognitive feedback can therefore be used to provide experts with an understanding of their decision policies if they are unknown. (Balzer, Doherty, & O'Connor 1989; Patterson 1990)

4. Presentation of Cognitive Feedback

Cognitive feedback can be presented in various formats. Because individuals differ in how they best absorb cognitive information, graphically or verbally, any cognitive

aid should incorporate both methods to maximize effectiveness. *Function forms* have been used to graphically display the relationships between individual cues and the ultimate judgement. Another method is to present individual *beta values* as obtained from the single system lens model regression equation. These beta values are usually displayed graphically, but textual and verbal formats are also used. (Patterson 1990)

E. SUMMARY

Single-system cognitive feedback techniques can be used for assigning weights to the various cues on which experts base their decisions. These policy capturing techniques have been successfully used as decision aids for judgment analysis (Balzer, Doherty, & O'Connor 1989) and can often characterize an expert's judgments better than experts themselves (von Winterfeldt 1988). Insights, via cognitive feedback, into the policies that experts use to make decisions could also offset the fact that experts cannot always articulate their knowledge (Boose 1985) or express specific weights for individual policy cues (Doherty & Balzer 1988). Use of these techniques, therefore, may prove better suited for use in eliciting knowledge in synthesis class problems than current paradigms such as Personal Construct psychology.

Since delay in presenting cognitive feedback to an individual reduces the effectiveness of that feedback (Patterson 1990), a computer-based cognitive aid which can instantaneously provide textual or graphical feedback could be an ideal judgment evaluation tool. The following chapter describes the **Expert System Knowledge Acquisition and Policy Evaluation using Cognitive Feedback (ESKAPE/CF)** model. This prototype knowledge acquisition tool incorporates the timely and flexible presentation of computer graphics, coupled with the proven effectiveness of cognitive feedback techniques.

III. ESKAPE/CF: A TOOL FOR KNOWLEDGE ACQUISITION

A. System Overview

The Expert System Knowledge Acquisition and Policy Evaluation using Cognitive Feedback system is a prototype knowledge acquisition tool which uses cognitive feedback techniques and lens model algorithms to elicit and record expert knowledge. It can also be used by experts to clarify their decision making processes. As defined by its specifications (Patterson 1990), ESKAPE/CF provides for direct interaction with the user, a sound theoretical paradigm, and may be broadly applicable across various domains.

Using the ESKAPE/CF system, the expert enters the various cues upon which his or her decision is based. These cues, in turn, may have further sub-cues. As cues are entered, the expert can specify correlations between pairs of cues to indicate any interrelationships. This type of scaling requires the expert to make an internal judgment which is more effective in capturing decision policies than external introspection (Cooke & McDonald 1988).

Once all cues and correlations have been entered, the user is presented with sample cases and asked to assess the cues and make appropriate judgments. After the judgments are made,

the expert is provided with cognitive feedback in the form of lens model beta weights and function forms based on judgments made in the test cases. The user can then accept the current cues/weights or edit the cues and run more test cases.

The ESKAPE/CF interface is designed so that an expert can expand and test the knowledge base without restrictions. Help facilities are available and the system notifies the user in the case of incomplete or inconsistent information. The interface is designed to be flexible, to minimize differences with the expert's cognitive style which can reduce resistance to using the system (Hoffman 1989; Olson & Rueter 1987).

1. Terminology

The following terms are used throughout the program explanations:

a. Cue

Value that an expert considers when making a judgment. An expert may consider several cues in the decision making process.

b. Judgment node

A judgment (or cue) whose value is determined by evaluating decision cues.

c. Root judgment

The ultimate decision being captured by the ESKAPE/CF system.

d. Child

A cue that is used by a judgment node in determining a decision. A judgment node may have several child cues.

e. Sibling

Two cues used by the same judgment -- both children of the same judgment node. Siblings are the only cues which can be correlated.

f. Cue weights (beta weights)

The relative percentage an expert places on an individual cue when making a decision. These values are calculated by the ESKAPE/CF program during the cue evaluation process.

g. Subtree

Group of cues headed by a judgment node which consists of all children, grandchildren, great-grandchildren, etc..

2. ESKAPE/CF Hardware and Software Requirements

The ESKAPE/CF system was developed on Sun/Sun compatible workstations. To provide "reasonable" system response times, a workstation running ESKAPE/CF should be rated at 20 MIPS or greater. Machines, slower than 20 MIPS, that were used in initial system development proved very slow in processing more than four decision cues due to extensive matrix calculations (Press and others 1990, 39-46).

The ESKAPE/CF system is written in "C" and was developed using Unix/SunOS version 4.0.3. The program uses SunWindows to generate the user interface and Sun CGI to provide some of the graphical presentations. A complete listing of required libraries and header files are contained in file definitions.h and the program makefile.

3. ESKAPE/CF Session Overview

The ESKAPE/CF system is designed so that the user can choose which tasks he or she wishes to perform. The program generates appropriate help messages to ensure that the expert does not choose a function if any prerequisites have yet to be completed. A typical ESKAPE session might proceed as follows:

1. Enter user name.
2. Define ROOT Judgment.
3. Create decision cues with ADD CUE.
4. Create any subcues required using EXPLODE CUE and ADD CUE as required.
5. Correlate decision cues as needed with CORRELATE CUES.
6. Evaluate all judgment nodes with more than two decision cues using EVALUATE CUE.
7. View the accumulated knowledge base using KNOWLEDGE BASE.
8. Generate sample case to verify the captured judgment policies using GENERATE CASES.
9. Save the knowledge base using SAVE FILE or SAVE AS and quit the ESKAPE Program.

Follow-on sessions and other ESKAPE/CF options include:

1. Load previously saved knowledge bases using LOAD FILE.
2. Edit previously defined cues with the EDIT CUE.
3. Delete previously defined cues with the DELETE CUE.
4. Move decision cues within the knowledge base using MOVE CUE.
5. Reevaluate decision cues and generate new cases.

4. ESKAPE/CF Application Areas

Research has indicated that cognitive feedback may be applicable to various problem solving techniques and may be best suited to inference tasks. It may also be used as a training tool in complex learning situations such as anti-submarine warfare tactics or nuclear reactor operations. (Patterson 1990) Other possible application areas discussed in literature (Patterson 1990, Balzer, Doherty, & O'Connor 1989; Hammond, McClelland, & Mumpower 1980) include:

1. Software estimation
2. Personnel evaluation
3. Economic forecasting
4. Battlefield situation assessment
5. Medical diagnosis
6. Hardware diagnosis
7. Security risk analysis

5. Program Limitations

The limitations "built into" the ESKAPE/CF system were intended to somewhat simplify the prototype program. These limitations can be lessened by varying parameters in the program or adding more efficient computational routines.

a. Decision Cues

Although Phelps and Shanteau (1978) indicate that some experts can use up to eleven decision cues, the ESKAPE/CF program limits the maximum number of decision cues to seven. This limit was established to place a fixed upper bound on storage space and computational time. Additionally, seven cues appeared a sufficient nominal value because other research indicates the cognitive limit for most individuals is five to seven items (Miller 1956). The maximum number of decision cues can be raised (or lowered) by simply changing one parameter in the ESKAPE/CF program.

b. Discrete Decision Cues and Judgment Nodes

By using the linear regression techniques offered by the lens model, one must assume that the possible values of a judgment and its decision cues are continuous in nature. Unfortunately, discrete or categorical decision variables are not continuous and therefore regression analysis may only provide a rough approximation of the beta values for these cues.

If the judgment node is continuous and the decision cues are discrete, *analysis of covariance* (or regression analysis with dummy variables) can be used to provide accurate analysis. Similarly, if the judgment node is discrete, *linear logistic* or *logit* models should be used instead of multivariable linear regression. (Fienberg 1977, 2-4) Incorporation of these models into the ESKAPE/CF program is left for future upgrades.

B. SAMPLE KNOWLEDGE ACQUISITION SESSION

One of the application areas previously discussed is the realm of software estimation. Vicinanza (1990) proposes a model for software cost estimation based on several factors such as *size*, *program attributes*, *personnel attributes* and *project attributes*. These factors are then broken down into further subcues for use by the model. For example, program complexity (CPLX), performance (PERF), and reliability (RELY) are some of the subcues for the factor *program attributes*.

The cues illustrated in Vicinanza (1990) are used to demonstrate how a knowledge base could be built using the ESKAPE/CF program. It should be noted that both continuous and discrete decision variables are used in the Vicinanza (1990) model. Therefore, as previously discussed, the linear regression routines in the prototype ESKAPE/CF model provide only approximations to beta values.

1. Program Initiation and Operation

The session begins with the user entering his or her name, up to fourteen characters, as shown in Figure 3. This is used to create a unique user trace file which will contain a listing of all actions taken by the user along with an appropriate timestamp. A sample user trace file is included in the Appendix.

The program is designed to be used with a mouse for selection tasks and the keyboard for entering textual or numeric data. When entering text or numbers, a carriage return is required to alert the program that an input has been made. When selecting a button or item, the user "points" the mouse at the desired item and presses the left mouse button. Inputs or selections are verified by the program and appropriate error messages are generated as required. Context sensitive help is also available to the user at any time by selecting the help button with the mouse.

The availability of a particular function is denoted by the appearance of its associated function button. As shown in Figure 4, the ESKAPE/CF screen is broken up into four major sections (the title block is just that). The **System Message** panel displays acknowledgement or error messages generated by the program. The **File Information** panel displays the name of the current expert file and contains buttons for file manipulation. The **ESKAPE Control Panel** contains all of the

ESKAPE	<p>ESKAPE Expert System Knowledge Acquisition and Policy Evaluation</p>	<p>ESKAPE SYSTEM MESSAGES</p>
<p>Please enter your last name. Hit Return when finished.</p> <p>User name: connor.</p>		
<p>FILE INFORMATION</p> <p>Current file:</p>		<p>ESKAPE CONTROL PANEL</p> <p>HELP</p> <p>QUIT</p>

Figure 3. Entering user name.

<div>ESKAPE</div> <div>ESKAPE SYSTEM MESSAGES</div>	<div>ESKAPE Expert System Knowledge Acquisition and Policy Evaluation</div>
<div></div>	
<div>ESKAPE</div>	<div> <div>ESKAPE CONTROL PANEL</div> <div> <div>Root Judgement</div> <div>Correlate Cues</div> <div>Move Cue</div> <div>Generate Cases</div> </div> <div> <div>Add Cue</div> <div>Edit Cue</div> <div>Evaluate Cues</div> <div>HELP</div> </div> <div> <div>Delete Cue</div> <div>Explode Cue</div> <div>knowledge base</div> <div>QUIT</div> </div> </div> <div> <div>FILE INFORMATION</div> <div>Current file:</div> <div> <div>LOAD FILE</div> <div>CLEAR TREE</div> <div>SAVE AS</div> </div> </div>

Figure 4. Generic ESKAPE/CF screen.

buttons used to perform cue creation, manipulation, and evaluation. The large central **Working Panel** is used to present displays and selections to the user.

2. Initializing Root Judgment Value

The first task an expert should accomplish is to set the type and possible values of the root judgment node. Figure 5 depicts the cue edit screen after selecting the **ROOT Judgment** button on the **ESKAPE** control panel. The cue type is selected by selecting the desired cue type, either **Integer**, **Float**, or **Categorical**. Integer and float cue ranges are then specified by entering the minimum and maximum values for that cue, as depicted by Figure 5. However, the user may enter up to ten discrete values for a categorical cue. Once the appropriate values for the cue are entered, the user should select the **SAVE CUE DATA** button.

3. Adding New Cues

After setting the root judgment, the user is ready to add the first decision cue by selecting the **ADD CUE** button on the **ESKAPE** control panel. The first cue in the knowledge tree is always a decision cue of the root judgment. Figure 6 shows the first decision cue *size* being entered as a float type.

After saving the *size* cue, the user is shown a selection screen similar to Figure 7. Here, the user selects a cue where he or she desires to add a sibling. In this

ESCAPE	
ESCAPE SYSTEM MESSAGES	ESCAPE Expert System Knowledge Acquisition and Policy Evaluation
<p>Please enter required cue data, Pressing enter after each item. Click Save Cue Data when finished</p> <p>Cue name: Root Judgement</p> <p>Select the desired cue type: <input checked="" type="checkbox"/> INTEGER <input checked="" type="checkbox"/> FLOAT <input checked="" type="checkbox"/> CATEGORICAL</p> <p>Please specify numerical cue limits:</p> <p>Enter minimum value: 0</p> <p>Enter maximum value: 500</p> <p> <input type="button" value="QUIT ROOT JUDGEMENT"/> <input type="button" value="SAVE CUE DATA"/> </p>	
ESCAPE CONTROL PANEL	<p>FILE INFORMATION</p> <p>Current file:</p> <p> <input type="button" value="HELP"/> <input type="button" value="QUIT"/> </p>

Figure 5. Creating the root judgment.

ESKAPE	<div data-bbox="144 966 171 1188">ESKAPE SYSTEM MESSAGES</div>	<div data-bbox="144 376 281 569"> ESKAPE Expert System Knowledge Acquisition and Policy Evaluation </div>
<div data-bbox="343 598 404 1226"> Please enter required cue data, Pressing enter after each item. Click Save Cue Data when finished </div> <div data-bbox="452 985 487 1139"> Cue name: size </div> <div data-bbox="589 724 686 1139"> Select the desired cue type: <input checked="" type="checkbox"/> INTEGER <input type="checkbox"/> FLOAT <input type="checkbox"/> CATEGORICAL </div> <div data-bbox="720 772 754 1139"> Please specify numerical cue limits: </div> <div data-bbox="775 792 809 1101"> Enter minimum value: 0.000000 </div> <div data-bbox="830 772 864 1101"> Enter maximum value: 500.000000 </div> <div data-bbox="967 666 1008 1197"> <div data-bbox="967 1004 1008 1197">QUIT ADD CUES</div> <div data-bbox="967 666 1008 850">SAVE CUE DATA</div> </div>		
<div data-bbox="1029 994 1063 1197">ESKAPE CONTROL PANEL</div> <div data-bbox="1145 705 1234 879"> <div data-bbox="1145 705 1179 879">HELP</div> <div data-bbox="1200 705 1234 879">QUIT</div> </div>		<div data-bbox="1029 386 1063 560">FILE INFORMATION</div> <div data-bbox="1083 502 1118 637">Current file:</div>

Figure 6. Adding first decision cue.

ESKAPE	<div data-bbox="130 956 150 1178">ESKAPE SYSTEM MESSAGES</div>	<div data-bbox="130 367 267 560"> ESKAPE Expert System Knowledge Acquisition and Policy Evaluation </div> <div data-bbox="322 966 349 1497">Please select the cue where you wish to add a sibling:</div> <div data-bbox="363 1294 391 1487"> <input type="button" value="QUIT ADD CUES"/> </div> <div data-bbox="425 1410 445 1458">size</div>	<div data-bbox="1015 985 1035 1188">ESKAPE CONTROL PANEL</div> <div data-bbox="1125 695 1152 869"> <input type="button" value="HELP"/> </div> <div data-bbox="1179 695 1207 869"> <input type="button" value="QUIT"/> </div> <div data-bbox="1015 376 1035 540">FILE INFORMATION</div> <div data-bbox="1070 502 1090 618">Current file:</div>
--------	--	--	---

Figure 7. Edit selection screen after adding cue "size."

example, the user selects *size* (the only choice) and another cue edit screen is presented. In this case the user enters the categorical decision cue *program attrib* which has values ranging from "very low" (VL) to "very high" (VH) as shown in Figure 8. This cue addition process continues by adding two other decision cues, *person attrib* and *project attrib*.

4. Exploding Cues

After the first tier of decision cues has been created, the expert can explode them into further subcues as required. After selecting the EXPLODE CUE button on the ESKAPE control panel, the selection screen in Figure 9 is displayed. The user then selects the *size* cue to explode and enters appropriate data for the *KSLOC* cue on the forthcoming edit screen. After saving the *KSLOC* cue, the selection screen appears as in Figure 10. The other first tier cues are also exploded resulting in the selection screen in Figure 11.

At this point, further subcues can be entered by exploding the first tier cues or by adding new cues (ADD CUE) directly to the second tier, as shown in Figure 12. As levels of cues are entered, the screen scrolls so that all cues may not be visible for selection. In this case, the user can click on the appropriate scroll bar to display "hidden" cues.

ESKAPE											
ESKAPE SYSTEM MESSAGES	ESKAPE Expert System Knowledge Acquisition and Policy Evaluation										
<p>Please enter required cue data, Pressing enter after each item. Click Save Cue Data when finished</p> <p>Cue name: program attrib</p> <p>Select the desired cue type: <input checked="" type="checkbox"/> INTEGER <input type="checkbox"/> FLOAT <input type="checkbox"/> CATEGORICAL</p> <p>Please specify desired cue values:</p> <table> <tbody> <tr><td>1) VL</td><td>6) •</td></tr> <tr><td>2) L</td><td>7)</td></tr> <tr><td>3) N</td><td>8)</td></tr> <tr><td>4) H</td><td>9)</td></tr> <tr><td>5) VH</td><td>10)</td></tr> </tbody> </table> <p> <input type="button" value="QUIT ADD CUES"/> <input type="button" value="SAVE CUE DATA"/> </p>		1) VL	6) •	2) L	7)	3) N	8)	4) H	9)	5) VH	10)
1) VL	6) •										
2) L	7)										
3) N	8)										
4) H	9)										
5) VH	10)										
ESKAPE CONTROL PANEL	<p>FILE INFORMATION</p> <p>Current file:</p> <p> <input type="button" value="HELP"/> <input type="button" value="QUIT"/> </p>										

Figure 8. Adding cue "program attrib."

<p>ESKAPE Expert System Knowledge Acquisition and Policy Evaluation</p>	<p>ESKAPE SYSTEM MESSAGES</p>
---	-------------------------------

Please select the cue you wish to explode:

size
program attrib
person attrib
project attrib

<p>FILE INFORMATION</p> <p>Current file:</p>	<p>ESKAPE CONTROL PANEL</p> <p><input type="button" value="HELP"/></p> <p><input type="button" value="QUIT"/></p>
--	---

Figure 9. Explode cue selection page.

<p>ESKAPE Expert System Knowledge Acquisition and Policy Evaluation</p>	<p>ESKAPE SYSTEM MESSAGES</p>
---	-------------------------------

Please select the cue you wish to explode:

size KSLOC

program attrib

person attrib

project attrib

<p>FILE INFORMATION</p> <p>Current file:</p>	<p>ESKAPE CONTROL PANEL</p> <p><input type="button" value="HELP"/></p> <p><input type="button" value="QUIT"/></p>
--	---

Figure 10. Explode cue selection page after "KSLOC."

<div> <div>ESKAPE</div> <div>Expert System Knowledge Acquisition and Policy Evaluation</div> </div>	
<div>ESKAPE SYSTEM MESSAGES</div>	
<div> <div>Please select the cue where you wish to add a sibling:</div> <div> <div>QUIT ADD CUES</div> </div> <div> <div>size</div> <div>program attrib</div> <div>person attrib</div> <div>project attrib</div> </div> <div> <div>KSLOC</div> <div>CPLX</div> <div>ACAP</div> <div>MODP</div> </div> </div>	
<div>ESKAPE CONTROL PANEL</div>	
<div> <div>FILE INFORMATION</div> <div>Current file:</div> <div> <div>HELP</div> <div>QUIT</div> </div> </div>	

Figure 11. Explode cue selection page after exploding all.

<p>ESKAPE Expert System Knowledge Acquisition and Policy Evaluation</p>	<p>ESKAPE SYSTEM MESSAGES</p>
---	-------------------------------

Please select the cue where you wish to add a sibling:

size	KSLOC
	EFIL
	INQT
	NFIL
	UIMP
	UOUT
	CPLX
	DIST
program attrib	MULT
	PERF
	RELY
person attrib	ACAP
project attrib	MODP

<p>FILE INFORMATION</p> <p>Current file:</p>	<p>ESKAPE CONTROL PANEL</p> <p><input type="button" value="HELP"/></p> <p><input type="button" value="QUIT"/></p>
--	---

Figure 12. Add cue selection page after adding all siblings.

5. Correlating Cues

After entering the decision cues, the expert enters his or her estimates of the correlation between combinations of cues. To correlate cues, the user should first select CORRELATE CUES on the ESKAPE control panel, yielding a selection screen similar to Figure 13. The user then selects the first of the two cues he or she wishes to correlate¹. Once selected, the first cue flashes and the system waits for the user to select a sibling. The user can "deselect" the first cue by clicking on that cue when it is visible.

When the second cue to be correlated is selected, a correlation screen similar to Figure 14 is displayed. The user then points to the desired correlation factor in the slider bar and presses the left mouse button.

The user is allowed to correlate decision cues because many naturalistic systems can be described by correlated cues (e.g., height/weight, smoking/cancer, etc.). The system limits this correlation factor to $\pm 40\%$ because Monte Carlo simulation revealed that $\pm 40\%$ was the largest generable correlation for the random data sets used by the program. Additionally, highly correlated cues introduce data redundancy and create a multicollinearity problem, degrading the accuracy of the regression model (Fienberg 1977). If two cues are

¹The SAVE FILE button is now visible because the knowledge base was saved after all the cues were entered. See section B.13 for further information on saving the knowledge base.

ESKAPE		ESKAPE Expert System Knowledge Acquisition and Policy Evaluation
<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">ESKAPE SYSTEM MESSAGES</div> <p style="margin-top: 20px;">Please select the two cues you wish to correlate: (The first cue selected will blink)</p> <div style="border: 1px solid black; padding: 2px; display: inline-block; margin-bottom: 10px;">QUIT CORRELATE CUES</div> <div style="display: flex; justify-content: space-between; margin-top: 20px;"> <div style="width: 30%;"> <p>elze</p> </div> <div style="width: 60%;"> <p>KSLOC</p> <p>EFIL</p> <p>INQT</p> <p>MFIL</p> <p>UIMP</p> <p>UOUT</p> <p>CPLX</p> <p>DIST</p> <p>MULT</p> <p>PERF</p> <p>RELY</p> <p>ACAP</p> <p>AEXP</p> <p>PCAP</p> <p>VEXP</p> </div> </div> <div style="display: flex; justify-content: space-between; margin-top: 20px;"> <div style="width: 30%;"> <p>program attrib</p> </div> <div style="width: 60%;"></div> </div> <div style="display: flex; justify-content: space-between; margin-top: 20px;"> <div style="width: 30%;"> <p>person attrib</p> </div> <div style="width: 60%;"></div> </div>		<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">FILE INFORMATION</div> <p>Current file: conncdemo.xpt</p> <div style="border: 1px solid black; padding: 2px; display: inline-block; margin-top: 10px;">SAVE FILE</div>
<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">ESKAPE CONTROL PANEL</div> <div style="display: flex; justify-content: space-around; margin-top: 20px;"> <div style="border: 1px solid black; padding: 5px; text-align: center;">HELP</div> <div style="border: 1px solid black; padding: 5px; text-align: center;">QUIT</div> </div>		

Figure 13. Correlate cue selection page.


ESKAPE	<div data-bbox="152 962 175 1188">ESKAPE SYSTEM MESSAGES</div>	<div data-bbox="152 376 288 569">ESKAPE Expert System Knowledge Acquisition and Policy Evaluation</div>
<div data-bbox="353 672 408 1271"> <p>Please select the correlation factor between CPLX and RELY</p> <p>Click Save Correlation when finished</p> </div> <div data-bbox="563 672 618 1271"> <p>[-25] -100  100</p> <p>Correlation Factor (%)</p> </div> <div data-bbox="710 1049 738 1242"> <input type="button" value="QUIT CORRELATE CUES"/> </div> <div data-bbox="710 701 738 894"> <input type="button" value="SAVE CORRELATION"/> </div>		
<div data-bbox="1044 994 1067 1197">ESKAPE CONTROL PANEL</div> <div data-bbox="1153 705 1236 879"> <input type="button" value="HELP"/> <input type="button" value="QUIT"/> </div>		<div data-bbox="1044 386 1067 550">FILE INFORMATION</div> <div data-bbox="1094 343 1122 627">Current file: cornordemo.xpt</div> <div data-bbox="1208 357 1236 454"> <input type="button" value="SAVE FILE"/> </div>

Figure 14. Setting the correlation factor.

highly correlated, the user should only use one cue and delete the other. If the user is unsure regarding the correlation between a pair of cues, he or she should leave the correlation set at zero.

6. Evaluating Cues

Once the cues have been created and correlated, the user can evaluate decision cues with two or more children. (If a cue has only one child, the cue and the child are the same and the child should be deleted.) The user selects EVALUATE CUE from the ESKAPE control panel and is presented with a selection panel similar to Figure 15. The user then selects the cue he or she wishes to evaluate and the program generates sample cases for the user to evaluate.

The program generates random cases within the limits and correlations specified by the user. The number of cases generated depends on the number of decision cues -- 30 cases for up to three cues, with an additional five cases for each cue above three. This ensures that sufficient cases are generated to provide stability in regression analysis. (Stewart 1988). The evaluation panel for the *program attrib* cue is shown in Figure 16. The user is asked to enter his or her judgment of the *program attrib* based on the values of the five decision cues -- *CPLX*, *DIST*, *MULT*, *PERF*, and *RELY*. The allowable values for the judgment node can be displayed at

ESKAPE		ESKAPE SYSTEM MESSAGES		ESKAPE Expert System Knowledge Acquisition and Policy Evaluation	
<p>Please select the cue you wish to evaluate:</p> <p><input type="button" value="QUIT EVALUATE"/></p>				<p>root <input checked="" type="checkbox"/></p>	
<p>size</p>				<p>KSLOC</p> <p>EFIL</p> <p>INQT</p> <p>WFIL</p> <p>UINP</p> <p>UOUT</p> <p>CPLX</p> <p>DIST</p> <p>MULT</p> <p>PERF</p> <p>RELY</p> <p>ACAP</p> <p>AEXP</p> <p>PCAP</p> <p>VEXP</p>	
<p>program attrib</p>				<p>person attrib</p>	
<p>ESKAPE CONTROL PANEL</p> <p><input type="button" value="HELP"/></p> <p><input type="button" value="QUIT"/></p>				<p>FILE INFORMATION</p> <p>Current file: comordemo.xpt</p> <p><input type="button" value="SAVE FILE"/></p>	

Figure 15. Evaluation cue selection page.

ESKAPE

ESKAPE SYSTEM MESSAGES

ESKAPE
Expert System
Knowledge Acquisition
and
Policy Evaluation

Please enter judgements based on the cues provided:

QUIT EVALUATE

CPLX	DIST	MULT	PERF	RELY	program attrib
H	H	N	N	L	N
H	VL	H	H	N	N
VL	N	H	N	N	N
N	L	H	VL	N	N
L	L	VH	N	VL	N
VL	VL	L	L	H	N
L	L	VH	L	N	N
VL	VL	H	H	L	N
H	VL	H	VH	VL	N
H	H	L	H	VL	N
H	VH	H	VL	N	N

FILE INFORMATION

Current file: conno.deno.xpt

SAVE FILE

ESKAPE CONTROL PANEL

HELP

QUIT

Figure 16. Evaluating cue "program attrib."

this point, as in Figure 17, by selecting HELP on the ESKAPE control panel.

Since the evaluation page is scrollable, the user can go back and change a judgment after he or she makes it. Once all the judgments are made, the program calculates appropriate beta weights and presents feedback to the user.

7. Feedback

Feedback is provided to the user in three forms as reported by Patterson (1990). The default presentation is Cue Relationships, but the user can selectively view any presentation. If the user decides that the evaluation was valid, he or she must remember to save the knowledge base. If the program is terminated without saving, cue evaluations (and other information) might be lost.

At this point the expert will see if any of the cues have beta weights near zero, indicating that the expert really didn't consider them in the decision making process. In this case, it may be appropriate to delete those cues and reevaluate to get a more accurate picture of the decision making process.

a. Cue Relationships with Decision Weights

The cue that was evaluated is displayed as the head of a subtree as in Figure 18. Its decision cues are also depicted along with their corresponding beta weights. The

ESKAPE ESKAPE SYSTEM MESSAGES		ESKAPE Expert System Knowledge Acquisition and Policy Evaluation
<div style="border: 1px solid black; padding: 2px; display: inline-block;">QUIT EVALUATE</div>	<p>Please enter judgments based on the cues provided.</p> <div style="border: 1px solid black; padding: 10px; margin: 10px 0;"> <p style="text-align: center;">Cue value information for program attrib</p> <p>Cue type: Categorical</p> <p>Defined cue values: VL L N H VH</p> <p style="text-align: center;">Values for your decision must match one of the above values EXACTLY.</p> </div> <div style="display: flex; justify-content: space-between; align-items: center; margin-top: 10px;"> <div style="text-align: center;"> VL N VL L </div> <div style="border: 1px solid black; padding: 5px 10px;">Done</div> </div>	<p>FILE INFORMATION</p> <p>Current file: connoordemo.xpt</p> <div style="border: 1px solid black; padding: 2px; display: inline-block; margin-top: 10px;">SAVE FILE</div>
<div style="border: 1px solid black; padding: 2px; display: inline-block;">QUIT</div>	<p style="text-align: center;">ESKAPE CONTROL PANEL</p>	

Figure 17. Evaluate cue help screen.

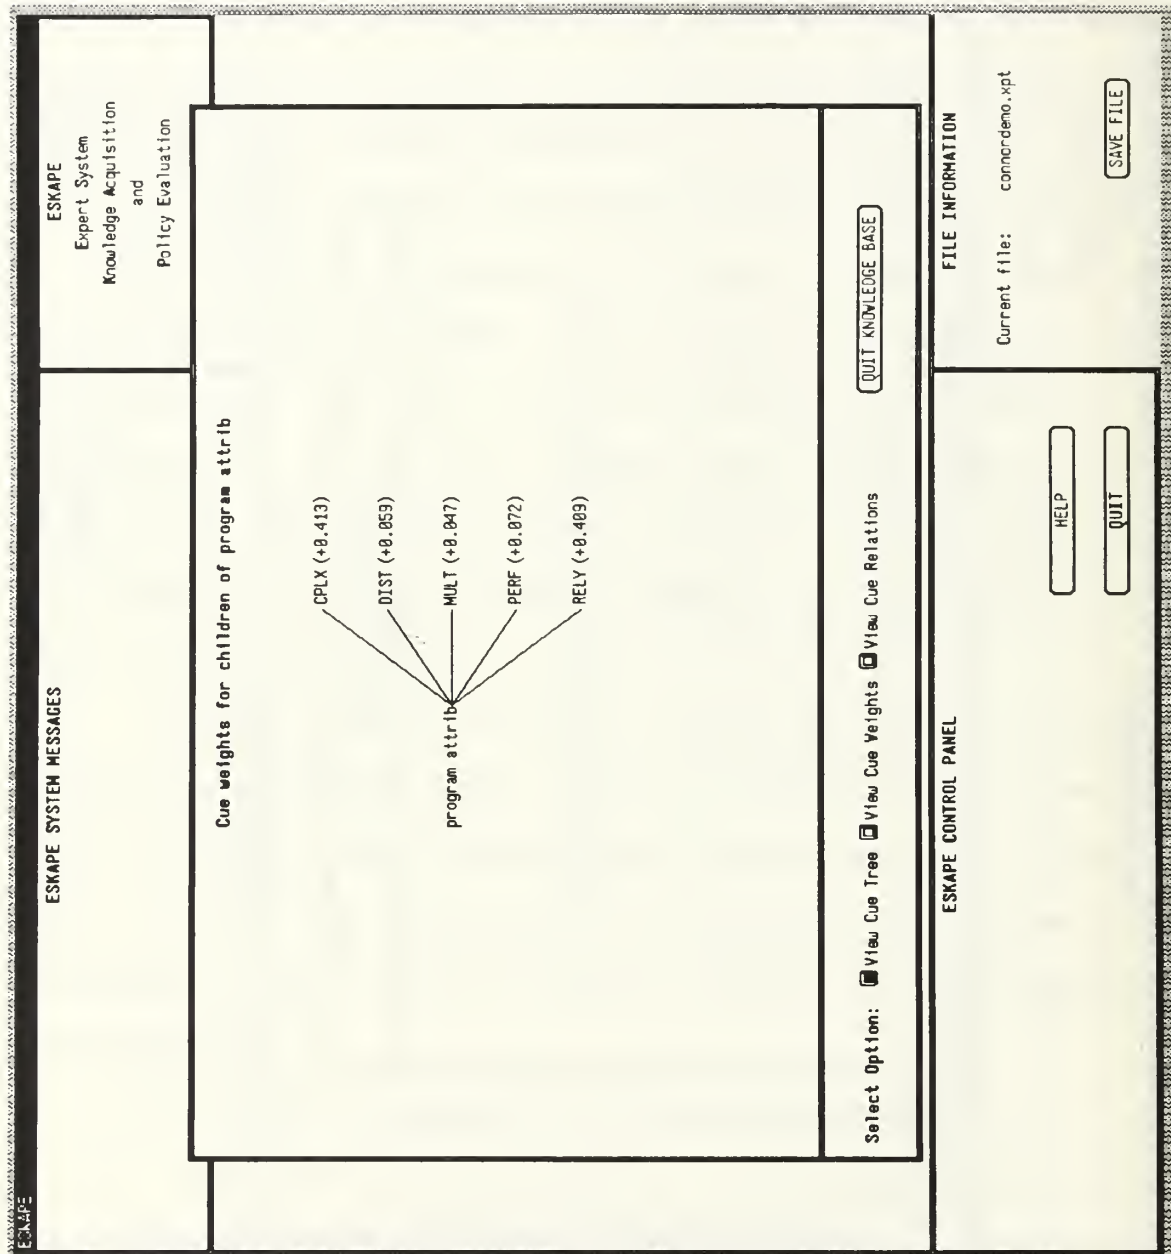


Figure 18. Cue relationship feedback.

beta weights indicate the degree to which the expert relies on a particular cue in the decision making process.

b. Decision Weights

The beta weights of for the decision cues are displayed in a stacked bar format, positive correlations above the axis, negative below. The beta weights indicate the degree to which the expert relies on a particular cue in the decision making process. This format is shown in Figure 19.

c. Function Forms

The values for each decision cue are plotted against the value of the judgment. This presentation, as in Figure 20, can show trends or relationships between individual cues and the judgment. For example, the slight upward trend shown in Figure 20 for cue *CPLX* may indicate a slight positive correlation between *CPLX* and *program attrib*. Similarly, the relatively flat relationship between *MULT* and *program attrib* may indicate that *MULT* has little or no bearing on the decision process.

8. Viewing the Knowledge Base

At any time, the expert can view the accumulated knowledge base by selecting KNOWLEDGE BASE on the ESKAPE control panel. The user must then elect to view the entire tree or view a decision cue that has been already evaluated, as shown in Figure 21. If the single cue option is chosen, a selection panel similar to Figure 22 is presented. After a

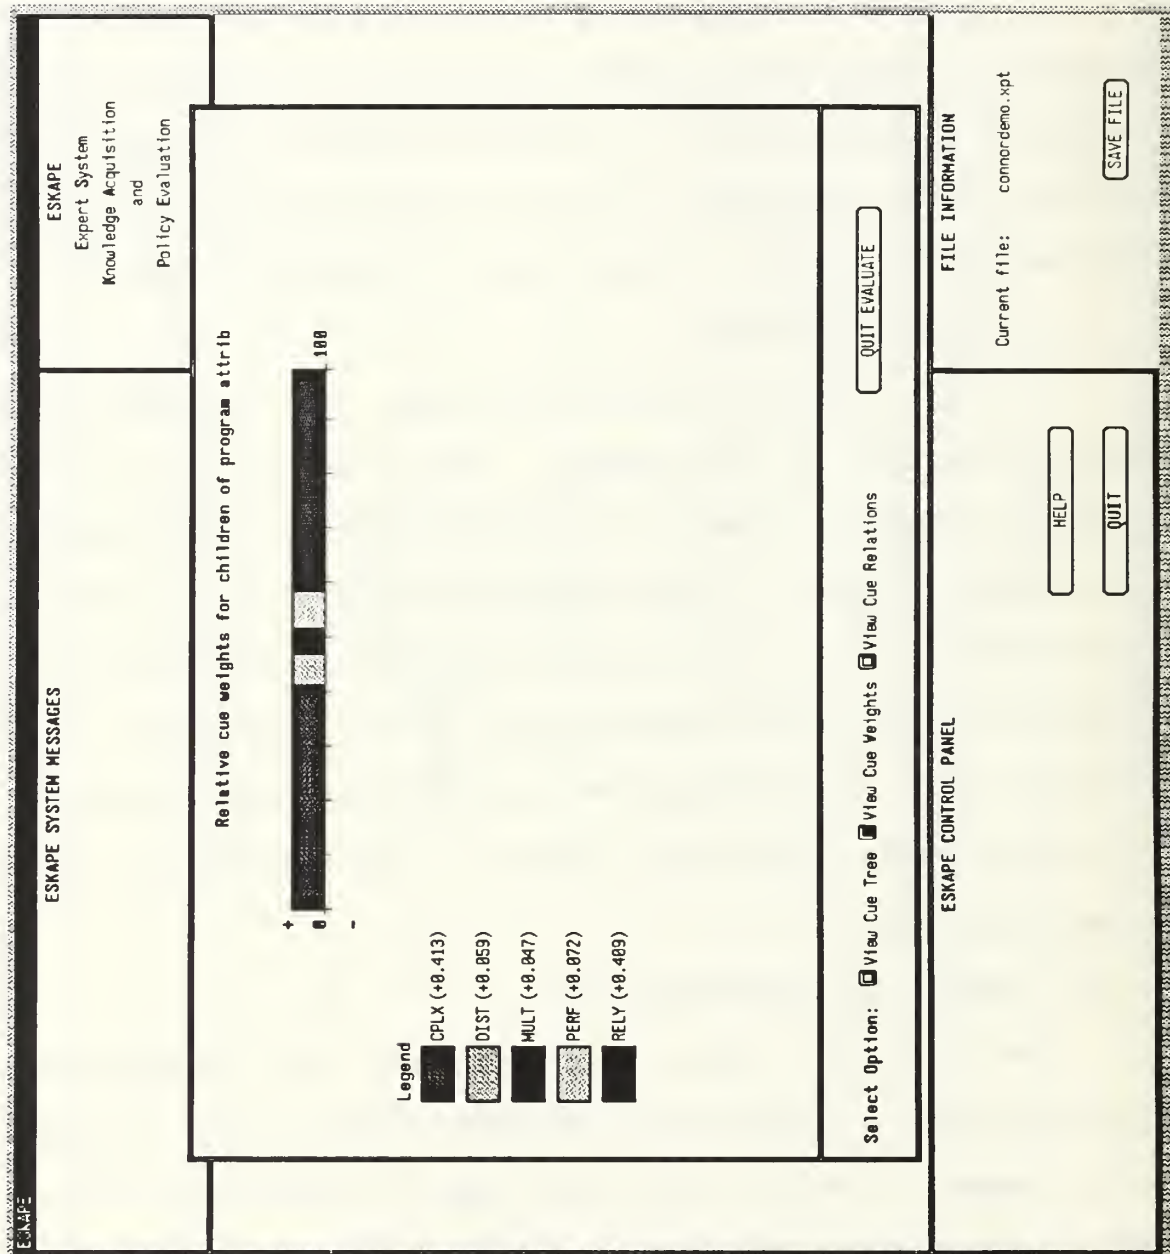


Figure 19. Decision weight feedback.

ESKAPE

ESKAPE
Expert System
Knowledge Acquisition
and
Policy Evaluation

ESKAPE SYSTEM MESSAGES

Relationships between program attrib and its children

program attrib

CPLX

program attrib

DIST

program attrib

MULT

program attrib

PERF

program attrib

RELY

Select Option:

☒ View Cue Tree
 ☒ View Cue Weights
 ☒ View Cue Relations

FILE INFORMATION

Current file: comordemo.xpt

Figure 20. Function forms feedback.

ESKAPE	<p>ESKAPE Expert System Knowledge Acquisition and Policy Evaluation</p>	<p>Please select the Knowledge Base display option you desire.</p> <p> <input type="button" value="View Entire Tree"/> <input type="button" value="View Single Cue"/> <input type="button" value="QUIT KNOWLEDGE BASE"/> </p>	<p>ESKAPE CONTROL PANEL</p> <p> <input type="button" value="HELP"/> <input type="button" value="QUIT"/> </p> <p>FILE INFORMATION</p> <p>Current file: conordemo.xpt</p> <p> <input type="button" value="SAVE FILE"/> </p>
--------	---	---	---

Figure 21. Knowledge base option selection page.

ESKAP=

ESKAPE
Expert System
Knowledge Acquisition
and
Policy Evaluation

ESKAPE SYSTEM MESSAGES

Please select the cue/knowledge you wish to view:

QUIT KNOWLEDGE BASE

root

size

KSLOC

EFIL

INQT

NFIL

UIMP

UOUT

CPLX

DIST

MULT

PERF

RELY

ACAP

AEXP

PCAP

VEXP

program attrib

person attrib

ESKAPE CONTROL PANEL

FILE INFORMATION

Current file: conordemo.xpt

SAVE FILE

HELP

QUIT

Figure 22. Singe cue knowledge base selection page.

specific cue is selected, the user will be shown the same screens generated during the evaluation of that cue.

If the user elects to view the entire knowledge tree, all decision cues, their children, grandchildren, etc. are displayed in a scrollable tree format. Additionally, as seen in Figure 23, the beta weights for evaluated cues are also displayed.

9. Generating Sample Cases

The expert can generate sample cases to validate his or her policies by selecting GENERATE CASES from the ESKAPE control panel. After selecting the appropriate cue from a selection screen, the expert is presented with numerous sample cases along with a judgment in each case based on the calculated decision weights, as in Figure 24. After viewing these judgments, the expert can either accept the outcomes or

1. Reevaluate the cue.
2. Edit one or more decision cues.
3. Delete one or more decision cues.
4. Correlate/recorrelate one or more pairs of decision cues.
5. Move decision cues around the knowledge tree.

The required knowledge has been captured if all cues with two or more children have been evaluated (including the root) and the expert is satisfied with the results of case generation in each case.

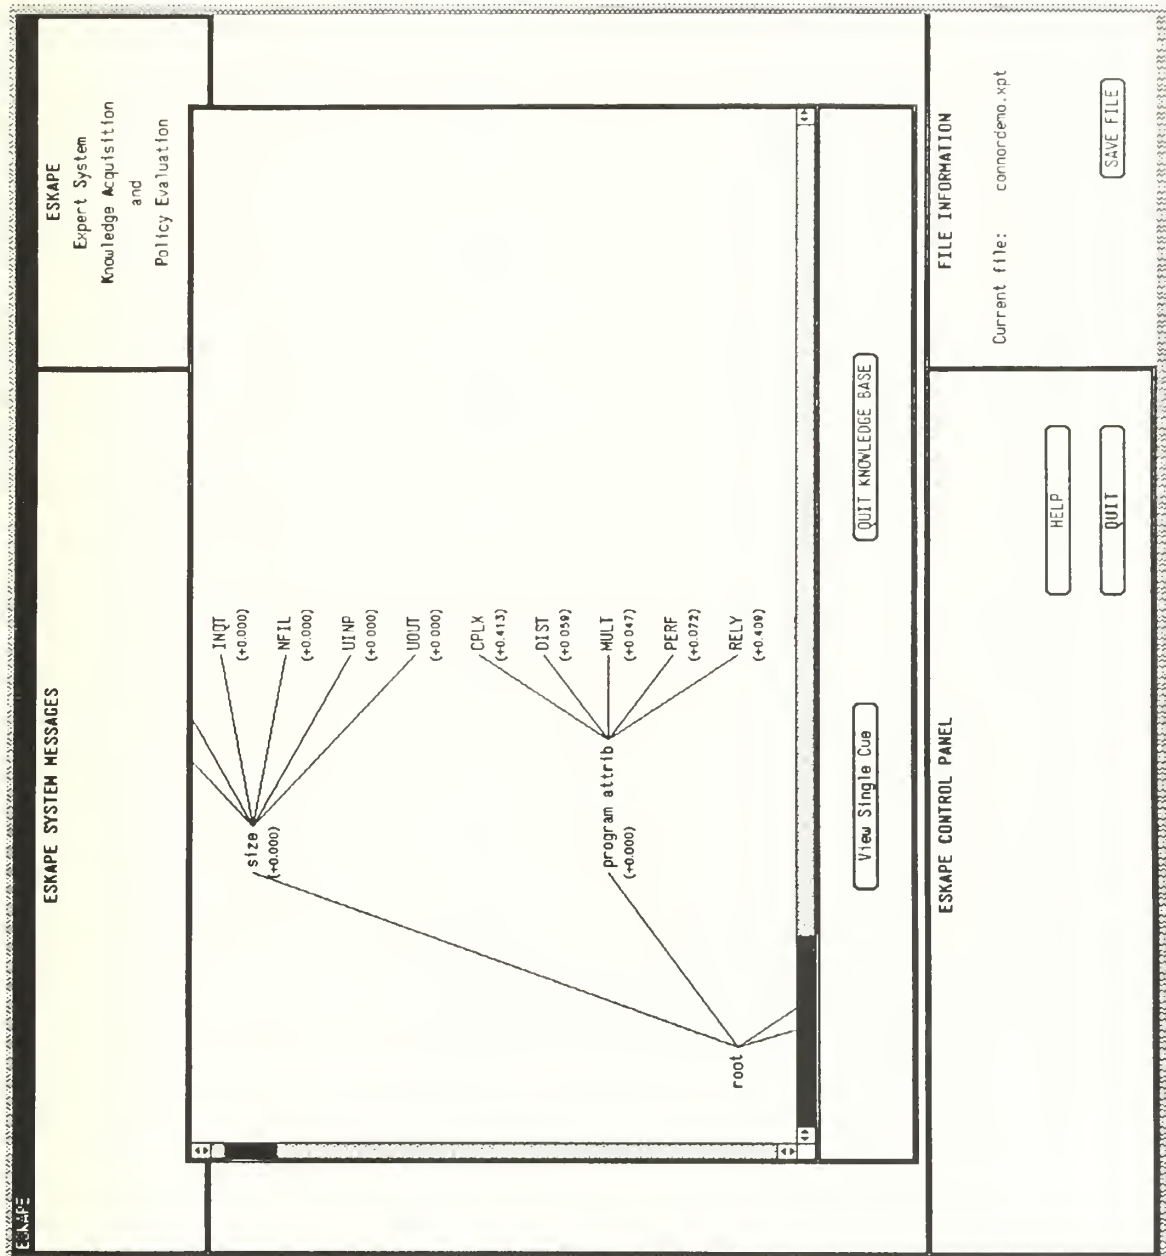


Figure 23. Entire knowledge tree.

ESKAPE	ESKAPE SYSTEM MESSAGES	ESKAPE Expert System Knowledge Acquisition and Policy Evaluation																																																																		
<p>These judgements are based on your evaluation of the cues.</p> <div style="display: flex; justify-content: space-between; align-items: center;"> QUIT GENERATE CASES <table border="1" style="width: 90%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th style="width: 10%;">CPLX</th> <th style="width: 10%;">DIST</th> <th style="width: 10%;">MULT</th> <th style="width: 10%;">PERF</th> <th style="width: 10%;">RELY</th> <th style="width: 50%;">program attrib</th> </tr> </thead> <tbody> <tr><td>VL</td><td>H</td><td>H</td><td>VH</td><td>N</td><td>L</td></tr> <tr><td>H</td><td>H</td><td>N</td><td>N</td><td>L</td><td>N</td></tr> <tr><td>H</td><td>VL</td><td>H</td><td>H</td><td>N</td><td>N</td></tr> <tr><td>VL</td><td>N</td><td>H</td><td>N</td><td>N</td><td>L</td></tr> <tr><td>N</td><td>L</td><td>H</td><td>VL</td><td>N</td><td>L</td></tr> <tr><td>L</td><td>L</td><td>VH</td><td>N</td><td>VL</td><td>VL</td></tr> <tr><td>VL</td><td>VL</td><td>L</td><td>L</td><td>H</td><td>L</td></tr> <tr><td>L</td><td>L</td><td>VH</td><td>L</td><td>N</td><td>L</td></tr> <tr><td>VL</td><td>VL</td><td>H</td><td>H</td><td>L</td><td>VL</td></tr> <tr><td>H</td><td>VL</td><td>H</td><td>VH</td><td>VL</td><td>N</td></tr> </tbody> </table> </div>			CPLX	DIST	MULT	PERF	RELY	program attrib	VL	H	H	VH	N	L	H	H	N	N	L	N	H	VL	H	H	N	N	VL	N	H	N	N	L	N	L	H	VL	N	L	L	L	VH	N	VL	VL	VL	VL	L	L	H	L	L	L	VH	L	N	L	VL	VL	H	H	L	VL	H	VL	H	VH	VL	N
CPLX	DIST	MULT	PERF	RELY	program attrib																																																															
VL	H	H	VH	N	L																																																															
H	H	N	N	L	N																																																															
H	VL	H	H	N	N																																																															
VL	N	H	N	N	L																																																															
N	L	H	VL	N	L																																																															
L	L	VH	N	VL	VL																																																															
VL	VL	L	L	H	L																																																															
L	L	VH	L	N	L																																																															
VL	VL	H	H	L	VL																																																															
H	VL	H	VH	VL	N																																																															
<div style="display: flex; justify-content: space-around;"> HELP QUIT </div>		<p style="text-align: center; margin-bottom: 10px;">FILE INFORMATION</p> <p>Current file: conardemo.xpt</p> <div style="text-align: right; margin-top: 10px;"> SAVE FILE </div>																																																																		

Figure 24. Generate cases screen for cue "program attrib."

10. Editing Cues

A cue may be edited once it has been created with either the add or explode cue functions. If EDIT CUE is selected on the ESKAPE control panel, a selection screen similar to Figure 25 is presented. An edit screen for the selected cue is then displayed which contains its previously entered values, as shown in Figure 26. The user then corrects the data as required and selects SAVE CUE DATA when finished. If a cue is edited, it must be reevaluated.

11. Deleting Cues

The user normally deletes a cue when he or she determines that the decision cue does not contribute to the decision making process. To delete a cue, the user selects DELETE CUE in the ESKAPE control panel, yielding the familiar selection screen of Figure 27. The user then selects and verifies that the cue should be deleted. After user confirmation, the cue and its entire subtree is deleted from the knowledge tree. Figure 28 shows the result of cue size being deleted.

12. Moving Cues

Moving a cue to a different part of the knowledge tree is a less destructive option than outright deletion. To move a cue, the user first selects MOVE CUE from the ESKAPE control panel. A selection screen similar to Figure 29 is

ESKAPE Expert System Knowledge Acquisition and Policy Evaluation	
<p style="text-align: center;">ESKAPE SYSTEM MESSAGES</p> <p>Please select the cue you wish to edit:</p> <p style="text-align: center;"><input type="button" value="QUIT EDIT CUES"/></p>	<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>size</p> <p>KSLOC EFIL INQT WFIL UINP UOUT CPLX DIST</p> </div> <div style="width: 45%;"> <p>program attrib</p> <p>MULT PERF RELY ACAP AEXP PCAP YEXP</p> </div> </div> <div style="display: flex; justify-content: space-between; margin-top: 20px;"> <div style="width: 45%;"> <p>person attrib</p> </div> </div>
<div style="display: flex; justify-content: space-between;"> <div style="width: 60%;"> <p style="text-align: center;">ESKAPE CONTROL PANEL</p> <div style="display: flex; justify-content: center; gap: 20px; margin-top: 20px;"> <input type="button" value="HELP"/> <input type="button" value="QUIT"/> </div> </div> <div style="width: 35%; text-align: right;"> <p>FILE INFORMATION</p> <p>Current file: conordemo.xpt</p> <p style="text-align: center;"><input type="button" value="SAVE FILE"/></p> </div> </div>	

Figure 25. Edit cue selection page.

ESKAPE	<div data-bbox="131 962 152 1180">ESKAPE SYSTEM MESSAGES</div> <div data-bbox="131 369 262 562"> ESKAPE Expert System Knowledge Acquisition and Policy Evaluation </div>
<div data-bbox="333 600 381 1219"> Please enter required cue data, Pressing enter after each item. Click Save Cue Data when finished </div> <div data-bbox="440 967 467 1132">Cue name: KSLOC</div> <div data-bbox="577 716 666 1132"> Select the desired cue type: <input checked="" type="checkbox"/> INTEGER <input type="checkbox"/> FLOAT <input type="checkbox"/> CATEGORICAL </div> <div data-bbox="707 774 735 1132">Please specify numerical cue limits:</div> <div data-bbox="762 852 790 1083">Enter minimum value: 0</div> <div data-bbox="817 832 845 1083">Enter maximum value: 400</div> <div data-bbox="954 996 982 1190"> <input type="button" value="QUIT EDIT CUES"/> <input type="button" value="SAVE CUE DATA"/> </div>	
<div data-bbox="1019 987 1039 1190">ESKAPE CONTROL PANEL</div> <div data-bbox="1129 697 1211 871"> <input type="button" value="HELP"/> <input type="button" value="QUIT"/> </div> <div data-bbox="1019 378 1039 542">FILE INFORMATION</div> <div data-bbox="1074 340 1101 620">Current file: comordemo.xpt</div> <div data-bbox="1184 349 1211 446"> <input type="button" value="SAVE FILE"/> </div>	

Figure 26. Edit page for cue "KSLOC."

ESKAPE Expert System Knowledge Acquisition and Policy Evaluation	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> ESKAPE SYSTEM MESSAGES </div> <p>Please select the cue you wish to delete:</p> <div style="border: 1px solid black; padding: 2px; margin-bottom: 10px; text-align: center;"> QUIT DELETE CUES </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p style="text-align: center;">size</p> <p>KSLOC</p> <p>EFIL</p> <p>INQT</p> <p>MFIL</p> <p>UINP</p> <p>UOUT</p> </div> <div style="width: 45%;"> <p style="text-align: center;">program attrib</p> <p>CPLX</p> <p>DIST</p> <p>MULT</p> <p>PERF</p> <p>RELY</p> <p>ACAP</p> <p>AEXP</p> <p>PCAP</p> <p>YEXP</p> </div> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p style="text-align: center;">person attrib</p> </div> </div>
	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> ESKAPE CONTROL PANEL </div> <div style="display: flex; justify-content: space-around; margin-bottom: 10px;"> <div style="border: 1px solid black; padding: 5px; text-align: center;">HELP</div> <div style="border: 1px solid black; padding: 5px; text-align: center;">QUIT</div> </div> <div style="border: 1px solid black; padding: 5px;"> FILE INFORMATION Current file: conordemo.xpt </div> <div style="border: 1px solid black; padding: 5px; text-align: right; margin-top: 10px;"> SAVE FILE </div>

Figure 27. Delete cue selection page.

ESKAPE		ESKAPE Expert System Knowledge Acquisition and Policy Evaluation																														
<div style="display: flex; justify-content: space-between;"> <div style="width: 30%;"> <p style="text-align: center;">ESKAPE SYSTEM MESSAGES</p> </div> <div style="width: 65%;"> <p style="text-align: center;">Please select the cue you wish to delete:</p> <div style="border: 1px solid black; padding: 2px; margin: 5px 0; text-align: center;">QUIT DELETE CUES</div> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; text-align: center;">CPLX</td> <td></td> </tr> <tr> <td style="text-align: center;">DIST</td> <td></td> </tr> <tr> <td style="text-align: center;">MULT</td> <td></td> </tr> <tr> <td style="text-align: center;">PERF</td> <td></td> </tr> <tr> <td style="text-align: center;">RELY</td> <td></td> </tr> <tr> <td style="text-align: center;">ACAP</td> <td></td> </tr> <tr> <td style="text-align: center;">AEXP</td> <td></td> </tr> <tr> <td style="text-align: center;">PCAP</td> <td></td> </tr> <tr> <td style="text-align: center;">VEXP</td> <td></td> </tr> <tr> <td style="text-align: center;">SSIZ</td> <td></td> </tr> <tr> <td style="text-align: center;">MCMT</td> <td></td> </tr> <tr> <td style="text-align: center;">STFT</td> <td></td> </tr> <tr> <td style="text-align: center;">MODP</td> <td></td> </tr> <tr> <td style="text-align: center;">SPEC</td> <td></td> </tr> <tr> <td style="text-align: center;">DOCU</td> <td></td> </tr> </table> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;"> <p>program attrib</p> </div> <div style="text-align: center;"> <p>person attrib</p> </div> <div style="text-align: center;"> <p>project attrib</p> </div> </div> </div> </div>			CPLX		DIST		MULT		PERF		RELY		ACAP		AEXP		PCAP		VEXP		SSIZ		MCMT		STFT		MODP		SPEC		DOCU	
CPLX																																
DIST																																
MULT																																
PERF																																
RELY																																
ACAP																																
AEXP																																
PCAP																																
VEXP																																
SSIZ																																
MCMT																																
STFT																																
MODP																																
SPEC																																
DOCU																																
<div style="display: flex; justify-content: space-between;"> <div style="width: 60%;"> <p style="text-align: center;">ESKAPE CONTROL PANEL</p> <div style="display: flex; justify-content: space-around; margin-top: 20px;"> <div style="border: 1px solid black; padding: 5px 20px;">HELP</div> <div style="border: 1px solid black; padding: 5px 20px;">QUIT</div> </div> </div> <div style="width: 35%;"> <p style="text-align: center;">FILE INFORMATION</p> <p>Current file: commando.xpt</p> <div style="border: 1px solid black; padding: 5px; margin-top: 10px; text-align: center;">SAVE FILE</div> </div> </div>																																

Figure 28. Delete cue selection page after deleting "size."

ESCAPE	ESCAPE SYSTEM MESSAGES	ESCAPE Expert System Knowledge Acquisition and Policy Evaluation						
<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px; text-align: center;"> QUIT MOVE </div> <p>Please select the cue you wish to move and its new sibling: (The first cue selected (cue you are moving) will blink)</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; text-align: center; vertical-align: top;"> program attrib </td> <td style="width: 70%; text-align: center; vertical-align: top;"> CPLX DIST MULT PERF RELY ACAP AEXP PCAP VEXP SSIZ WGHT SIFT WOPP SPEC DOCU </td> </tr> <tr> <td style="text-align: center; vertical-align: top;"> person attrib </td> <td></td> </tr> <tr> <td style="text-align: center; vertical-align: top;"> project attrib </td> <td></td> </tr> </table>			program attrib	CPLX DIST MULT PERF RELY ACAP AEXP PCAP VEXP SSIZ WGHT SIFT WOPP SPEC DOCU	person attrib		project attrib	
program attrib	CPLX DIST MULT PERF RELY ACAP AEXP PCAP VEXP SSIZ WGHT SIFT WOPP SPEC DOCU							
person attrib								
project attrib								
ESCAPE CONTROL PANEL		FILE INFORMATION Current file: conordemo.xpt <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="border: 1px solid black; padding: 5px 20px;">HELP</div> <div style="border: 1px solid black; padding: 5px 20px;">QUIT</div> </div> <div style="border: 1px solid black; padding: 5px 20px; margin-top: 10px; text-align: center;"> SAVE FILE </div>						

Figure 29. Move cue selection page.

presented. The user must first select the cue he or she desires to move. Once selected, that cue will flash. To deselect the first cue, simply click on the flashing cue when it is visible. As with all functions, context sensitive help is available as shown by Figure 30.

After the first cue has been selected, the user must select the location where the cue is to be moved. That location is specified by selecting a node which will be a sibling of the moved cue (similar to ADD CUE). Figure 31 illustrates the result when CPLX is moved from its location under *program attrib* to its new location as a sibling of STFT (under *project attrib*).

13. Saving the Knowledge Base

At periodic intervals, the expert should save the accumulated knowledge base. The user must exit all subfunctions and select the SAVE AS button the first time a knowledge base is saved. This allows the user to enter a meaningful 10 character file name as shown in Figure 32. Once the file is saved, the name is displayed in the File Information panel and the SAVE FILE button becomes visible as in Figure 33. Whenever the SAVE FILE button is visible, the current file may be saved under its current name at any time.

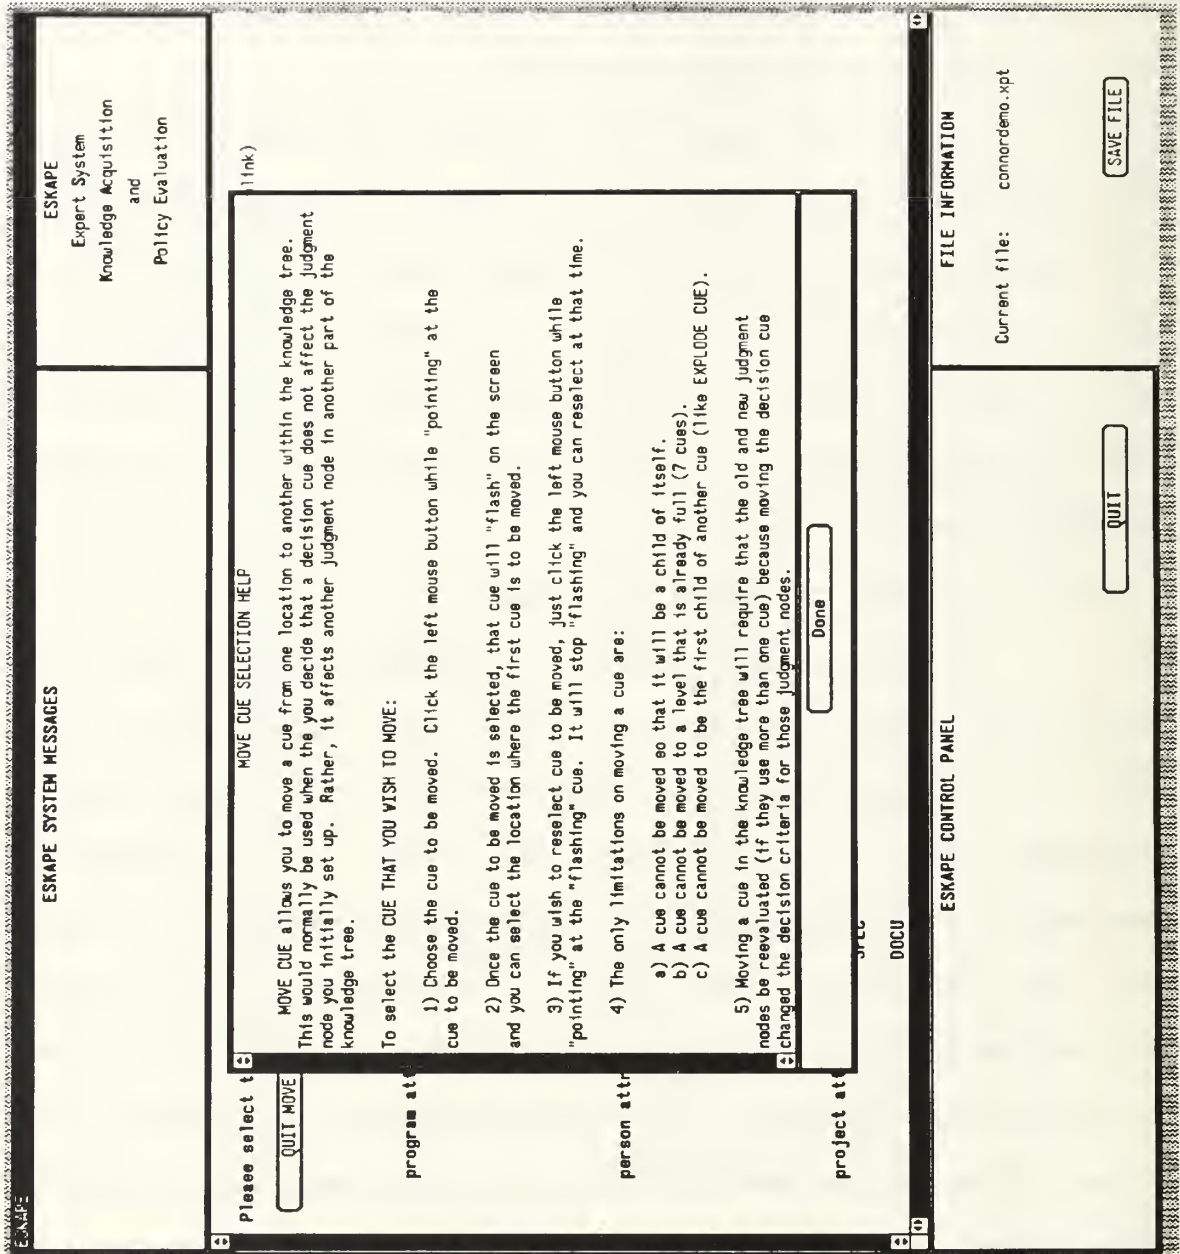


Figure 30. Move cue help screen.

ESKAPE		ESKAPE Expert System Knowledge Acquisition and Policy Evaluation	
<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> ESKAPE SYSTEM MESSAGES </div> <div style="border: 1px solid black; padding: 10px;"> <p>Please select the cue you wish to move and its new sibling: (The first cue selected (cue you are moving) will blink)</p> <div style="border: 1px solid black; padding: 2px; margin-bottom: 10px; text-align: center;">QUIT MOVE</div> <div style="display: flex; justify-content: space-between;"> <div style="width: 30%;"> <p>program attrib</p> </div> <div style="width: 60%;"> <p>DIST</p> <p>MULT</p> <p>PERF</p> <p>RELY</p> <p>ACAP</p> <p>AEXP</p> <p>PCAP</p> <p>VEXP</p> <p>SSIZ</p> <p>HCHT</p> <p>STFT</p> <p>CPLX</p> <p>MODP</p> <p>SPEC</p> <p>DOCU</p> </div> </div> <div style="display: flex; justify-content: space-between; margin-top: 10px;"> <div style="width: 30%;"> <p>person attrib</p> </div> <div style="width: 60%;"> </div> </div> <div style="display: flex; justify-content: space-between; margin-top: 10px;"> <div style="width: 30%;"> <p>project attrib</p> </div> <div style="width: 60%;"> </div> </div> </div>		<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> FILE INFORMATION </div> <div style="border: 1px solid black; padding: 10px;"> <p>Current file: conrademo.xpt</p> <div style="border: 1px solid black; padding: 2px; margin-top: 10px; text-align: center;">SAVE FILE</div> </div>	
<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> ESKAPE CONTROL PANEL </div> <div style="border: 1px solid black; padding: 10px;"> <div style="border: 1px solid black; padding: 2px; margin-bottom: 10px; text-align: center;">HELP</div> <div style="border: 1px solid black; padding: 2px; text-align: center;">QUIT</div> </div>			

Figure 31. Move cue selection page after moving "CPLX."

ESKAPE	<div data-bbox="142 966 166 1184">ESKAPE SYSTEM MESSAGES</div> <div data-bbox="142 374 279 566"> <div data-bbox="142 436 166 502">ESKAPE</div> <div data-bbox="170 374 279 566">Expert System Knowledge Acquisition and Policy Evaluation</div> </div>
<div data-bbox="371 656 403 1159">Please enter file name to save cues: connoir.dmg.xpt</div> <div data-bbox="454 811 485 1000">QUIT SAVE AS</div>	
<div data-bbox="1034 993 1057 1193">ESKAPE CONTROL PANEL</div> <div data-bbox="1144 703 1226 877"> <div data-bbox="1144 703 1171 877">HELP</div> <div data-bbox="1199 703 1226 877">QUIT</div> </div>	<div data-bbox="1034 386 1057 550">FILE INFORMATION</div> <div data-bbox="1085 510 1112 625">Current file:</div>

Figure 32. File "Save As" page.

ESKAPE	ESKAPE SYSTEM MESSAGES	<div data-bbox="130 291 301 647"> ESKAPE Expert System Knowledge Acquisition and Policy Evaluation </div>
<div data-bbox="1022 647 1241 1535"> ESKAPE CONTROL PANEL </div> <div data-bbox="1022 291 1241 647"> FILE INFORMATION Current file: connordemo.xpt <div data-bbox="1131 357 1159 454">LOAD FILE</div> <div data-bbox="1131 492 1159 589">SAVE AS</div> <div data-bbox="1131 627 1159 724">CLEAR TREE</div> <div data-bbox="1186 357 1214 454">SAVE FILE</div> </div>		

Figure 33. ESKAPE/CF screen showing "connordemo.xpt" loaded.

14. Loading Knowledge Bases

Once created and saved, a knowledge tree can be retrieved and loaded into memory for additional refinement. To retrieve an existing expert knowledge file, the user must select LOAD FILE in the File Information panel. After selection, the program searches for files with the ".xpt" extension and displays them for the user, as in figure 34. The user then selects the desired file to load into the ESKAPE program. If a knowledge tree already exists, the program will ask the user to confirm the file loading since it will overwrite the existing knowledge tree.

15. Clear Tree

The CLEAR TREE button on the File Information panel is used to erase the current knowledge tree. It is basically a mechanism by which an expert can clear a current session and start another without exiting the ESKAPE program.

C. SUMMARY

ESKAPE/CF is an interactive knowledge acquisition tool designed elicit relevant knowledge from an expert. The system provides experts with rapid feedback so that they can immediately evaluate their decision processes. This timely feedback overcomes the negative and counterproductive aspects of delayed feedback (Wickens 1984; Patterson 1990).

<div>ESKAPE</div> <div>ESKAPE Expert System Knowledge Acquisition and Policy Evaluation</div>							
<div>ESKAPE SYSTEM MESSAGES</div>	<div> <p>Select the desired expert knowledge file from those listed below:</p> <table> <tr> <td>buitest.xpt</td> <td>connordemo.xpt</td> <td>empty.xpt</td> </tr> <tr> <td>jimtest1.xpt</td> <td>kishore.xpt</td> <td>logtest.xpt</td> </tr> </table> <div>QUIT LOAD FILE</div> </div>	buitest.xpt	connordemo.xpt	empty.xpt	jimtest1.xpt	kishore.xpt	logtest.xpt
buitest.xpt	connordemo.xpt	empty.xpt					
jimtest1.xpt	kishore.xpt	logtest.xpt					
<div>ESKAPE CONTROL PANEL</div> <div> <div>HELP</div> <div>QUIT</div> </div>	<div>FILE INFORMATION</div> <div>Current file:</div>						

Figure 34. Load file selection page.

The expert can also expand and test an accumulated knowledge base without restrictions, thus minimizing any differences between the system and the user's cognitive style. Furthermore, by directly manipulating the system, the expert assumes many of the responsibilities currently performed by knowledge engineers. It is predicted that these two factors should result in a higher quality knowledge base that accurately represents the domain expert's decision processes. (Patterson 1990)

IV. CONCLUSIONS AND SUGGESTIONS FOR FUTURE RESEARCH

A. CONCLUSIONS

The demand for expert systems continues to grow at an increasing pace (Olson & Rueter 1987). Although the traditional method for creating a knowledge base has been knowledge engineering (Gruber 1988), the shortage of knowledge engineers coupled with the possibility of losing knowledge in the transfer process, has led to the use of interactive systems directly by the expert (Shaw & Gaines 1988). These systems have demonstrated the capability to shorten project development time (Boose 1985) and thus reduce the expert system construction "bottleneck."

Automated knowledge acquisition tools are supported by experts and expert system designers alike (Boose 1985). While usually interested and enthusiastic about a knowledge acquisition project (Boose 1985), an uncooperative expert will doom a project to failure (Olson & Rueter 1987). Gaining that expert's confidence and presenting a non-threatening computer interface are critical to project success. (Boose 1985)

Knowledge acquisition tools already in existence have had success at reducing the time required to create a knowledge base, but the psychological paradigms upon which they are

based may not offer the best method to capture "deep" policy knowledge (Boose 1985; Patterson 1990).

The ESKAPE/CF system is based on lens model techniques which have proven useful in eliciting "deep" policy knowledge from an expert (Balzer, Doherty, & O'Connor 1989). Coupling cognitive feedback techniques with an automated knowledge acquisition tool should not only reduce the time required for knowledge elicitation, but also capture knowledge that has been heretofore unattainable by existing systems and methods.

B. FUTURE RESEARCH

The development of the ESKAPE/CF system has revealed several areas where additional research is needed. Specifically,

1. ESKAPE/CF System Enhancements

a. Linear Logistic Analysis

The regression analysis module used to evaluate decision cues should be augmented by a linear logistic analysis module (Fienberg 1977). This will allow improved accuracy and reliability when evaluating categorical cues.

b. X-Windows Compatibility

The ESKAPE/CF system uses a proprietary interface (SunWindows) to generate system screens. If the system is modified to use an X-Windows interface, it would be more portable and possibly more widely used.

c. Applying ESKAPE/CF Knowledge to a Working Expert System

The knowledge captured by the ESKAPE/CF system must be ported to a working expert system if it is ever to be fully validated. Mechanisms and programs need to be developed to accomplish this task.

d. Expand the ESKAPE/CF Data Keeping Facilities

Currently, the only record-keeping functions are the knowledge base (tree) itself and the user trace file. Additional data that could be recorded are an expert's decision policies over time or comparisons of the decision policies of different experts for the same cognitive task.

2. Assessing ESKAPE/CF Validity

a. Applicable Task Areas

Empirical studies should be conducted to evaluate which knowledge acquisition tasks ESKAPE/CF is best suited.

b. System Usability

The system should be evaluated by "experts" to determine the usability of the ESKAPE/CF system. These evaluations would examine user interface issues along with the effectiveness of the model in capturing knowledge from the expert.

c. Comparison of Results using Different Experts

The results of the ESKAPE/CF sessions of different experts should be evaluated to determine if the system is

effective across several experts with different personalities and varying degrees of expertise.

d. Comparison of Results with Other Models

Once applicable task areas have been defined, the results of ESKAPE/CF knowledge acquisition sessions should be compared to those using other knowledge acquisition tools. The relative consistency and accuracy of the models would be of paramount concern. The system should be contrasted with existing automated tools such as Kitten and Aquinas (Boose & Bradshaw 1988; Shaw & Gaines 1987). Additionally, ESKAPE/CF cognitive feedback techniques could be evaluated against other learning paradigms such as Concept Learning System inductive techniques (Hunt, Marin, & Stone 1966; Quinlan 1983).

3. ESKAPE/CF Extensions

a. Learning Complex Tasks

Evaluate the ESKAPE/CF as a tool to teach complex decision making tasks. The underlying cognitive feedback mechanisms might be used to train individuals to better use the information available to them when making complex decisions.

b. Combining Expert Knowledge

Evaluate the system's effectiveness at combining the knowledge of several experts for a single decision task. (The prototype system will need to be enhanced to perform this analysis.)

c. Study the Decision Processes of Experts

Evaluate the utility of the ESKAPE/CF system in studying the decision processes of experts. Experts could be presented with varying sets of decision cues and their judgments analyzed to determine decision policies. This might also be used to provide experts with insight into previously unknown decision policies.

APPENDIX. SAMPLE USER TRACE

ESKAPE Version 1.0 User Action Trace File for Tue Feb 26 21:02:26 1991

02/26/91	21:02:26	GET	GET USER NAME	connor
02/26/91	21:02:40	LDF	LOAD FILE	select
02/26/91	21:02:53	LDF	LOAD FILE	connordemo.xpt
02/26/91	21:02:53	LDF	LOAD FILE	quit process
02/26/91	21:02:58	KBA	KNOWLEDGE BASE	select
02/26/91	21:03:02	KBA	KNOWLEDGE BASE	quit process
02/26/91	21:03:03	KBA	KNOWLEDGE BASE	select
02/26/91	21:03:34	KBA	KNOWLEDGE BASE	program attrib with Subtree
02/26/91	21:03:50	KBA	KNOWLEDGE BASE	program attrib with Subtree
02/26/91	21:04:06	KBA	KNOWLEDGE BASE	program attrib with Function
forms				
02/26/91	21:04:25	KBA	KNOWLEDGE BASE	quit process
02/26/91	21:04:26	KBA	KNOWLEDGE BASE	select
02/26/91	21:04:28	KBA	KNOWLEDGE BASE	Knowledge tree
02/26/91	21:05:19	KBA	KNOWLEDGE BASE	quit process
02/26/91	21:05:21	EVA	EVALUATE CUE	select
02/26/91	21:05:24	EVA	EVALUATE CUE	program attrib
02/26/91	21:05:27	HLP	EVALUATE CUE	help screen 91
02/26/91	21:05:45	EVA	EVALUATE CUE	quit process
02/26/91	21:05:49	EVA	EVALUATE CUE	select
02/26/91	21:05:53	EVA	EVALUATE CUE	project attrib
02/26/91	21:06:21	EVA	EVALUATE CUE	project attrib with Subtree
02/26/91	21:06:28	EVA	EVALUATE CUE	project attrib with Stacked bars
02/26/91	21:06:38	EVA	EVALUATE CUE	project attrib with Function
forms				
02/26/91	21:07:17	SAV	SAVE FILE	connordemo.xpt
02/26/91	21:07:28	EVA	EVALUATE CUE	select
02/26/91	21:07:32	EVA	EVALUATE CUE	size
02/26/91	21:07:38	EVA	EVALUATE CUE	quit process
02/26/91	21:07:46	SAV	SAVE FILE	connordemo.xpt
02/26/91	21:08:00	QUI	QUIT PROGRAM	quit process

LIST OF REFERENCES

- Anderson, John R. 1982. Acquisition of Cognitive Skill. *Psychological Review* 89: 369-406.
- Balzer, William K., Michael E. Doherty, and Raymond O'Connor, Jr. 1989. Effects of Cognitive Feedback on Performance. *Psychological Bulletin* 106: 410-433.
- Boose, John H. 1985. A Knowledge Acquisition Program for Expert Systems based on Personal Construct Psychology. *International Journal of Man-Machine Studies* 23: 495-525.
- Boose, John H. and Jeffrey M. Bradshaw. 1988. Expertise Transfer and Complex Problems: Using AQUINAS as a Knowledge-acquisition Workbench for Knowledge-based Systems. In *Knowledge-Based Systems*, vol. 2, *Knowledge Acquisition Tools for Expert Systems*, ed. J. H. Boose and B. R. Gaines, 39-64. San Diego: Academic Press.
- Brehemer, B. 1979. Preliminaries to a Psychology of Inference. *Scandinavian Journal of Psychology* 20: 193-210.
- Brunswick, E. 1955. The Conceptual Framework of Psychology. In *International Encyclopedia of Unified Science*, ed. O. Neurath, R. Carnap, and C. Morris, 655-760. Chicago: University of Chicago Press.
- Carroll, J. S. and J. W. Payne. 1976. The Psychology of Parole Decision Process: A Joint Application of Attribution Theory and Information-processing Psychology. In *Cognition and Social Behavior*, ed. J. S. Carroll and J. W. Payne. Hillsdale, NJ: Erlbaum.
- Cooke, Nancy M. and James E. McDonald. 1988. The Application of Psychological Scaling Techniques to Knowledge Elicitation for Knowledge-based Systems. In *Knowledge-Based Systems*, vol. 2, *Knowledge Acquisition Tools for Expert Systems*, ed. J. H. Boose and B. R. Gaines, 65-82. San Diego: Academic Press.
- Doherty, Michael E. and William K. Balzer. 1988. Cognitive Feedback. In *Human Judgement: The SJT View*, ed. Berndt Brehemer and C. R. B. Joyce, 163-188. Amsterdam: Elsevier Science Publishers.

- Einhorn, Hillel J. 1974. Expert Judgment: Some Necessary Conditions and an Example. *Journal of Applied Psychology* 59: 562-571.
- Einhorn, Hillel J., D. Kleinmuntz, and B. Kleinmuntz. 1979. Linear Regression and Process-Framing Models of Judgment. *Psychological Review* 86: 465-485.
- Fienberg, Stephen E. 1977. *The Analysis of Cross-Classified Categorical Data*. Cambridge, MA: MIT Press.
- Fitts, P. M. and M. I. Posner. 1967. *Human Performance*. Belmont, CA: Brooks Cole.
- Gaines, Brian R. 1987. An overview of Knowledge-Acquisition and Transfer. *International Journal of Man-Machine Studies* 26: 453-472.
- Garg-Janardan, Chaya and Gavriel Salvendy. 1988. A Conceptual Framework for Knowledge Elicitation. In *Knowledge-Based Systems*, vol. 2, *Knowledge Acquisition Tools for Expert Systems*, ed. J. H. Boose and B. R. Gaines, 119-129. San Diego: Academic Press.
- Gruber, Thomas R. 1988. Acquiring Strategic Knowledge from Experts. *International Journal of Man-Machine Studies* 29: 579-597.
- Hammond, K. R., G. H. McClelland, and J. Mumpower. 1980. *Human Judgment and Decision Making: Theory, Methods and Procedures*. New York: Praeger.
- Hoffman, Robert R. 1989. A Survey of Methods for Eliciting the Knowledge of Experts. *SIGART Newsletter* 108 (April).
- Hunt, E. B., J. Marin, and P. T. Stone. 1966. *Experiments in Induction*. New York: Academic Press.
- Kelly, G. A. 1955. *The Psychology of Personal Constructs*. New York: Norton.
- Kitto, Catherine M. and John H. Boose. 1989. Selecting Knowledge Acquisition Tools and Strategies Based on Application Characteristics. *International Journal of Man-Machine Studies* 31: 149-160.
- Larkin, J. H., J. McDermott, D. P. Simon and H. A. Simon. 1980. Expert and Novice Performance in Solving Physics Problems. *Science* 208: 1335-1342.

Libby, R. 1981. *Accounting and Human Information Processing: Theory and Applications*. Englewood Cliffs, NJ: Prentice Hall.

McGraw, K. L. and A. Riner. 1987. Task Analysis: Structuring the Knowledge Acquisition Process. *TI Technical Journal* November-December: 16-21.

McNurlin, Barbara C. and Ralph H Sprague. 1989. *Information Systems Management in Practice*. Englewood Cliffs, NJ: Prentice Hall.

Meehl, P. 1954. *Clinical Versus Statistical Prediction: Theoretical Analysis and a Review of the Evidence*. Minneapolis: University of Minnesota Press.

Miller, G. A. 1956. The Magical Number Seven Plus or Minus Two: Some limits on our Capacity for Processing Information. *Psychological Review* 63: 81-97.

Olson, Judith Reitman and Henry H. Rueter. 1987. Extracting Expertise from Experts: Methods for Knowledge Acquisition. *Expert Systems* 4: 152-168.

Patterson, Charles. 1990. *Cognitive Feedback as a Tool for Knowledge Acquisition*. Master's Thesis, Naval Postgraduate School, Monterey, CA.

Phelps, Ruth H. and James Shanteau. 1978. Livestock Judges: How Much Information Can an Expert Use? *Organizational Behavior and Human Performance* 21: 209-217.

Press, W., B. Flannery, S. Teukolsky, and W. Vetterling. 1990. *Numerical Recipes in C*. Cambridge, MA: Cambridge University Press.

Quinlan, J. R. 1983. Learning Efficient Classification Procedures and Their Application to Chess End Games. In *Machine Learning: An Artificial Intelligence Approach*, ed. R. S. Michalski, J. G. Carbonell, and T. M. Mitchell. Palo Alto, CA: Tioga Publishing.

Shanteau, James. 1990. The Psychology of Experts: An Alternative View. *Organizational Behavior and Human Performance*, forthcoming.

Shanteau, James. 1988. Psychological Characteristics and Strategies of Expert Decision Makers. *Acta Psychologica* 68: 203-215.

Shanteau, James and G. Gaeth. 1981. *Evaluation of the Field Method of Soil Texture Classification: A Psychological Analysis of Accuracy and Consistency*. Tech. Rep. 79-1. Kansas State University, Department of Psychology.

Shaw, Mildred L. G. and Brian R. Gaines. 1988. KITTEN: Knowledge Initiation and Transfer Tools for Experts and Novices. *International Journal of Man-Machine Studies* 27: 251-280.

Stewart, Thomas R. 1988. Judgment Analysis: Procedures. In *Human Judgement: The SJT View*, ed. Berndt Brehemer and C. R. B. Joyce, Amsterdam: Elsevier Science Publishers.

Vincinanza, Stephen S. 1990. Case-Based Software Cost Estimation. Ph.D. diss., Carnegie Mellon University.

von Winterfeldt, Detlof. 1988. Expert Systems and Behavioral Decision Research. *Decision Support Systems* 4: 461-471.

Wickens, C. D. 1984. *Engineering Psychology and Human Performance*. Columbus, OH: Charles E. Merrill.

INITIAL DISTRIBUTION LIST

Defense Technical Information Center Cameron Station Alexandria, VA 22304-6145	2
Dudley Knox Library Code 052 Naval Postgraduate School Monterey, CA 93943-5002	2
Prof. Kishore Sengupta Administrative Science Department (AS/SE) Naval Postgraduate School Monterey, CA 93943-5000	2
Prof. Tung Bui Administrative Science Department (AS/BD) Naval Postgraduate School Monterey, CA 93943-5000	1
LCDR James Connor 435 W. Ethel Lombard, IL 60148	3

Thesis
C71575 Connor
c.1 ESKAPE/CF.



DUDLEY KNOX LIBRARY



3 2768 00011539 8